

Part No: SAXXA2-S-3


## SMA Attenuators • Male to Female • DC – 3 GHz - 2 W

### 电气特性 ELECTRICAL

• Frequency Range	DC - 3 GHz
• Attenuation (dB)	1 through $9 \pm 0.40$ dB
	$10 \pm 0.5$ dB
	$12 \pm 0.5$ dB
	$15 \pm 0.5$ dB
	$20 \pm 0.6$ dB
	$30 \pm 0.8$ dB
	$40 \pm 0.8$ dB
• VSWR (MAX)	DC - 3 GHz.....1.20:1
• Impedance	50 Ohms
• RF Power Rating	Average : 2 Watts at 25°C Ambient Temperature PEAK : 100 Watts (5 μSec Pulse Width , 0.05% Duty Cycle)

### 机械特性 MECHANICAL

• Temperature Range	-20°C - +115°C
• Connectors	Brass , Nickel Plated
• Connector Pins	Beryllium Copper, Gold Plate
• Housing	Brass , Nickel Plated
• Insulators	PTFE , Virgin Electrical Grade

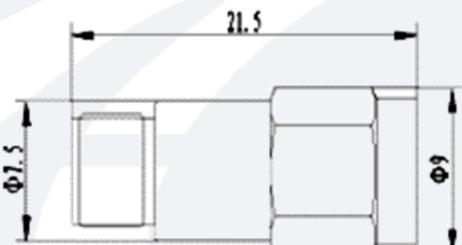

Unit : mm

### 订货信息 ORDER

Model Number : SAXXA2- S- 3

\_\_\_\_\_ dB Value