

**Part No: SAXXA2-S-13**


**SMA Attenuators • Male to Female • DC – 13 GHz-2W**

**电气特性 ELECTRICAL**

- **Frequency Range** DC - 13 GHz
- **Attenuation (dB)**
  - 5 ± 0.50 dB(DC - 6 GHz); 5 ± 0.80 dB(DC - 13 GHz)
  - 6 ± 0.50 dB(DC - 6 GHz); 6 ± 0.80 dB(DC - 13 GHz)
  - 10 ± 0.5 dB(DC - 6 GHz); 10 ± 1.2 dB(DC - 13 GHz)
  - 20 ± 0.5 dB(DC - 6 GHz); 20 ± 1.2 dB(DC - 13 GHz)
  - 30 ± 0.5 dB(DC - 6 GHz); 30 ± 1.2 dB(DC - 13 GHz)
  - 40 ± 1.2 dB(DC - 6 GHz); 40 ± 1.5dB(DC - 13 GHz)
- **VSWR (MAX)**
  - DC - 6 GHz.....1.25:1
  - DC - 13 GHz.....1.35:1
- **Impedance** 50 Ohms
- **RF Power Rating**
  - Average** : 2 Watts at 25°C
  - Ambient Temperature
  - PEAK** : 100Watts
  - (5 μSec Pulse Width , 0.05% Duty Cycle)

**机械特性 MECHANICAL**

- **Temperature Range** -20°C - +115°C
- **Connectors** Brass ,Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plate
- **Housing** Brass ,Nickel Plated
- **Insulators** PTFE , Virgin Electrical Grade

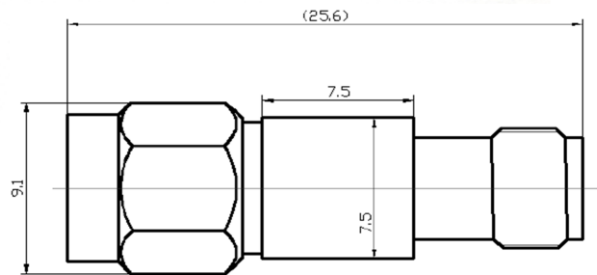

Unit : mm

**订货信息 ORDER**

Model Number: SAXXA2-S-13  
 └──────────┬──────────  
 dB Value

