

**Part No: SAXXA2-N-3**


**N Attenuators • Male to Female • DC – 3 GHz-2W**

**电气特性 ELECTRICAL**

- **Frequency Range** DC - 3 GHz
- **Attenuation (dB)**
  - 1 through 9 ± 0.40 dB
  - 10 .....± 0.50 dB
  - 12 .....± 0.50 dB
  - 15 .....± 0.50 dB
  - 20 .....± 0.60 dB
  - 30 .....± 0.80 dB
  - 40 .....± 0.80 dB
- **VSWR (MAX)** DC - 3 GHz.....1.20:1
- **Impedance** 50 Ohms
- **RF Power Rating**
  - Average** : 2 Watts at 25°C
  - PEAK** : 100 Watts
  - (5 μSec Pulse Width , 0.05% Duty Cycle)

**机械特性 MECHANICAL**

- **Temperature Range** -20°C - +115°C
- **Connectors** Brass , Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plate
- **Body** Brass , Nickel Plated
- **Insulators** PTFE , Virgin Electrical Grade

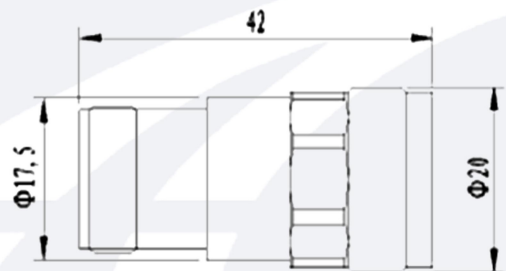

Unit : mm

**订货信息 ORDER**

Model Number : SAXXA2-N-3  
 └──────────┬──────────  
 dB Value