

Part No: SAXXA2-N-6


N Attenuators • Male to Female • DC – 6 GHz-2W

电气特性 ELECTRICAL

- **Frequency Range** DC - 6 GHz
- **Attenuation (dB)**
 - 1 through 9 ± 0.50 dB
 - 10± 0.60 dB
 - 12± 0.60 dB
 - 15± 0.60 dB
 - 20± 0.80 dB
 - 30± 1.20 dB
 - 40± 1.20 dB
- **VSWR (MAX)** DC - 6 GHz.....1.30:1
- **Impedance** 50 Ohms
- **RF Power Rating**
 - Average** : 2 Watts at 25°C
 - PEAK** : 100 Watts
 - (5 μSec Pulse Width , 0.05% Duty Cycle)

机械特性 MECHANICAL

- **Temperature Range** -20°C - +115°C
- **Connectors** Brass ,Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Brass ,Nickel Plated
- **Insulators** PTFE , Virgin Electrical Grade

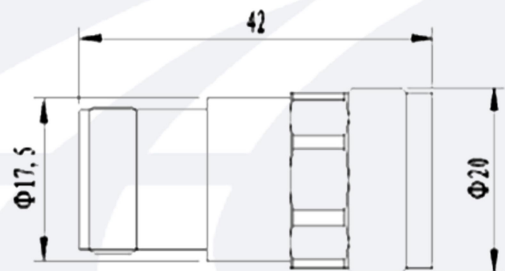

Unit : mm

订货信息 ORDER

Model Number : SAXXA2-N-6
 └──────────┬──────────
 dB Value