

Part No: RAXXA50-N-8


**N Attenuators • Male to Female • DC – 8 GHz - 50 W**

## 电气特性 ELECTRICAL

- **Frequency Range** DC – 8 GHz
- **Attenuation (dB)**
  - 1 through 9  $\pm 0.6$  dB
  - 10 .....  $\pm 0.6$  dB
  - 20 .....  $\pm 0.6$  dB
  - 30 .....  $\pm 0.75$  dB
  - 40 .....  $\pm 1.0$  dB
- **VSWR (MAX)**
  - DC – 6 GHz..... 1.20 : 1
  - 6 – 8 GHz.....1.30 : 1
- **Impedance** 50 Ohms
- **RF Power Nominal** 50 Watts Average at 25°C  
PEAK: 5000 Watts  
(5  $\mu$ Sec Pulse Width , 1% Duty Cycle)


## 机械特性 MECHANICAL

- **Temperature Range** -55°C - +125°C
- **Connectors** Brass ,Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Black, Finned Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

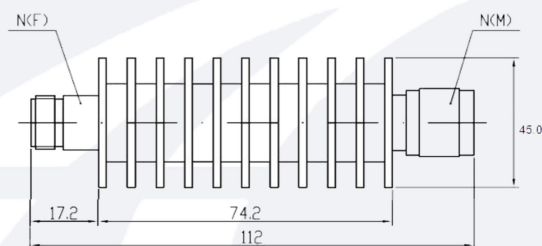

Unit:mm

## 订货信息 ORDER

Model Number : RAXXA50-N-8  

 dB Value