

Part No: RAXXA100-S-12.4


SMA Attenuators • Male to Female • DC – 12.4 GHz - 100 W

电气特性 ELECTRICAL

• Frequency Range	DC – 12.4 GHz
• Attenuation (dB)	3-1.0/+1.5 dB 6-1.0/+3.0 dB 10-1.0/+2.0 dB 20-1.0/+2.0 dB 30-0.7/+1.0 dB 40-0.5/+1.0 dB 50-0.5/+1.5 dB
• VSWR (MAX)	DC – 12.4 GHz..... 1.30 : 1
• Impedance	50 Ohms
• RF Power Nominal	100 Watts Average at 25°C PEAK: 1000 Watts (5 µSec Pulse Width , 10% Duty Cycle)

机械特性 MECHANICAL

• Temperature Range	-55°C - +125°C
• Connectors	Brass , Nickel Plated
• Connector Pins	Beryllium Copper, Gold Plated
• Body	Black, Finned Aluminum
• Insulators	PTFE, Virgin Electrical Grade

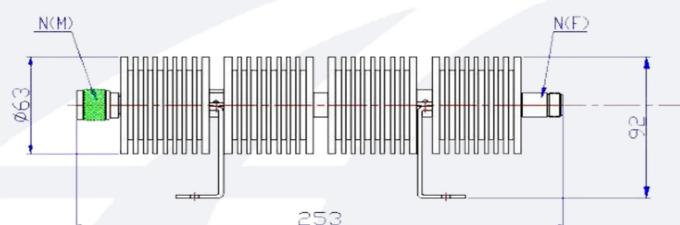

Connector: SMA and N are optional.
Unit:mm

订货信息 ORDER

Model Number : RAXXA100-S-12.4

_____ dB Value