

Part No: RAXXA100-3.5-26.5


3.5mm Attenuators • Male to Female • DC – 26.5 GHz - 100 W

电气特性 ELECTRICAL

• Frequency Range	DC – 26.5 GHz
• Attenuation (dB)	3-1.0/+1.5 dB 6-1.0/+2.5 dB 10-1.0/+3.5 dB 20-1.0/+3.0 dB 30-1.0/+1.5 dB 40-1.0/+1.5 dB 50-1.0/+1.5 dB
• VSWR (MAX)	DC – 26.5 GHz..... 1.40 : 1
• Impedance	50 Ohms
• RF Power Nominal	100 Watts Average at 25°C PEAK: 500 Watts (5 µSec Pulse Width , 2.5% Duty Cycle)

机械特性 MECHANICAL

• Temperature Range	-55°C - +125°C
• Connectors	Brass ,Gold Plated
• Connector Pins	Beryllium Copper, Gold Plated
• Housing	Black, Aluminum
• Insulators	PTFE, Virgin Electrical Grade

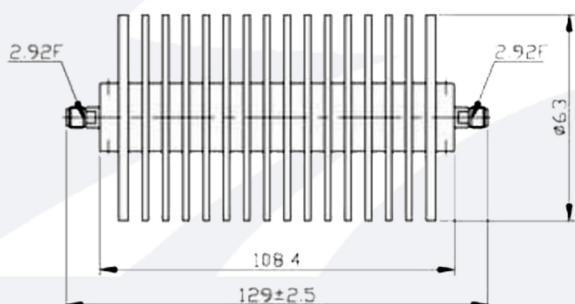

Connector: SMA , 3.5mm and K are optional.
Unit:mm

订货信息 ORDER

Model Number : RAXXA100-3.5-26.5
 dB Value