

**Part No: RAXXA500-N-4**


**N Attenuators • Male to Female • DC – 4 GHz - 500 W**

**电气特性 ELECTRICAL**

- **Frequency Range** DC – 4 GHz
- **Attenuation (dB)**
  - 10 .....± 2.0 dB
  - 20 .....± 2.0 dB
  - 30 ..... ± 1.5 dB
  - 40 ..... ± 1.5 dB
  - 50 ..... ± 1.5 dB
- **VSWR (MAX)** DC – 4 GHz..... 1.50 : 1
- **Impedance** 50 Ohms
- **RF Power Nominal** 500 Watts Average at 25°C  
 PEAK: 10000 Watts  
 (5 μSec Pulse Width , 5% Duty Cycle)

**机械特性 MECHANICAL**

- **Temperature Range** -55°C - +125°C
- **Connectors** Brass ,Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Black, Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

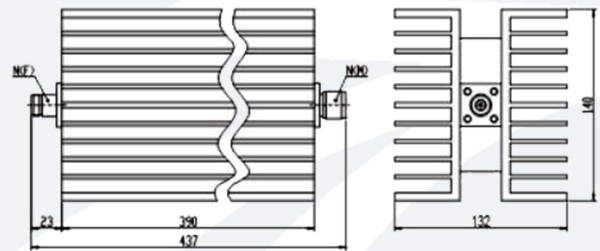

Connector: N and DIN 7/16 are optional.  
Unit:mm

**订货信息 ORDER**

Model Number : RAXXA500-N-4  
 └──────────┬──────────  
 dB Value