

Part No.: RS4DC130-S

Power Splitter/Combiner 4 Way SMA 50Ω DC to 13GHz

电气特性 Electrical:


工作频率 Frequency Range:	DC-13GHz
插入损耗 Insertion Loss:	≤12dB ± 2dB
驻波 VSWR:	≤1.50 : 1
耐功率 Power Handling:	1 Watt
阻抗 Impedance:	50 OHMS

机械特性 Mechanical:


温度范围 Temperature Range:	-55° C - +85° C
接口 Connectors:	SMA-Female
相对湿度 Relative Humidity:	0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

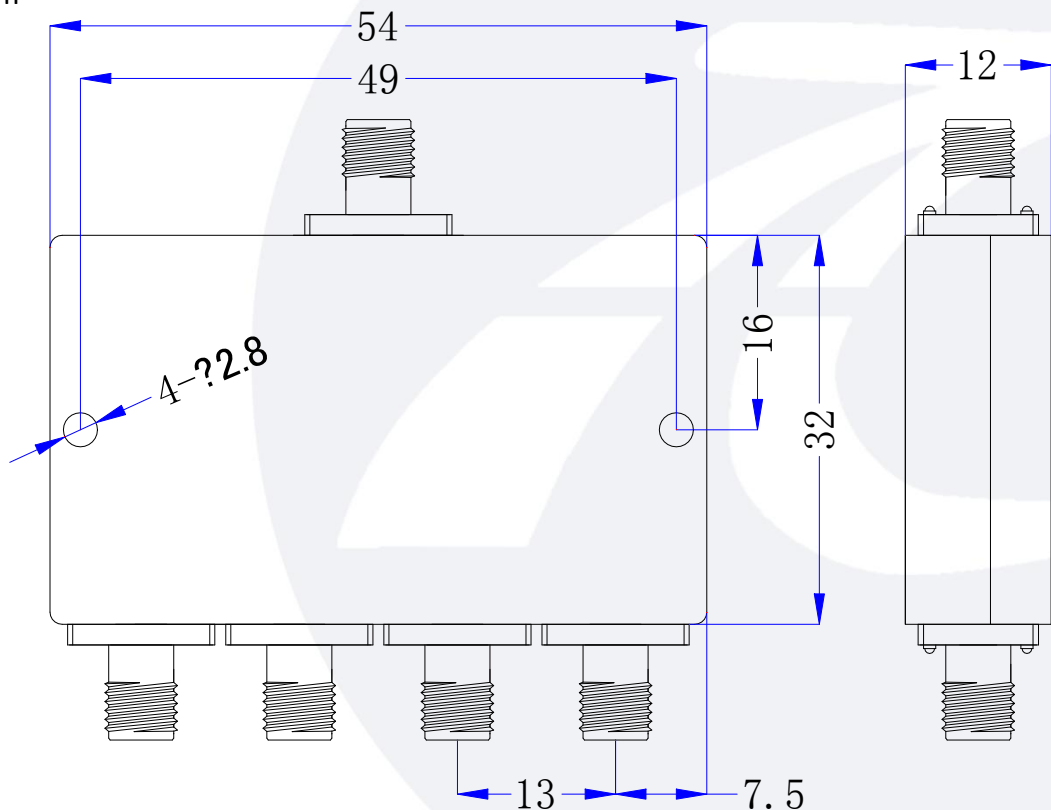


CH1 SWR 100 m / REF 1
S11 2: 1. 1636 13 . 000 000 000 GHz

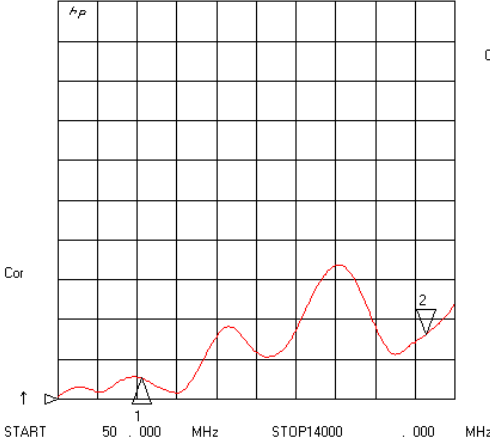

CH1 Markers
1: 1. 0533
3. 00000 GHz


26 Nov 2018 04:56:51

CH2 LOG 2 dB / REF -12 dB
S21 2: -12 . 889 dB 13 . 000 000 000 GHz

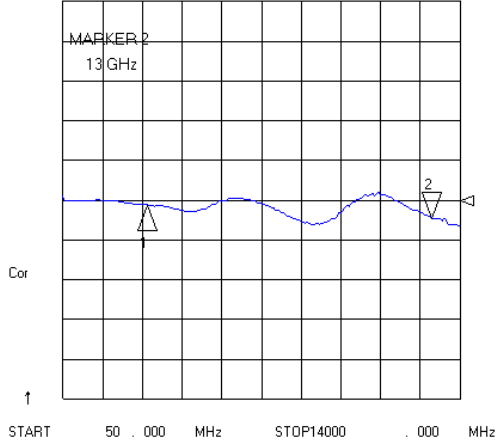


CH2 Markers
1: -12 . 233 dB
3. 00000 GHz

CH3 LOG 1 dB / REF 0 dB
S12/M 2: . 01100 dB 13 . 000 000 000 GHz

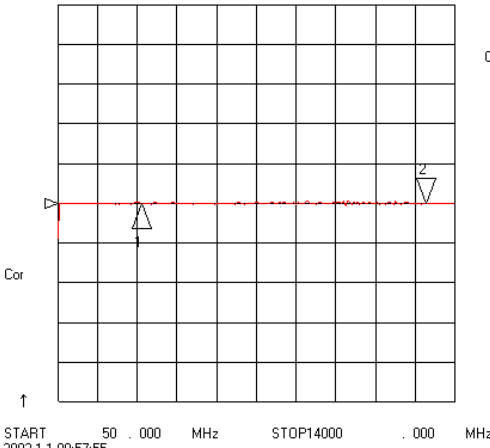

CH3 Markers
1: . 01300 dB
3. 00000 GHz

CH4 SWR 100 m / REF 1
S22 2: 1. 0731 13 . 000 000 000 GHz

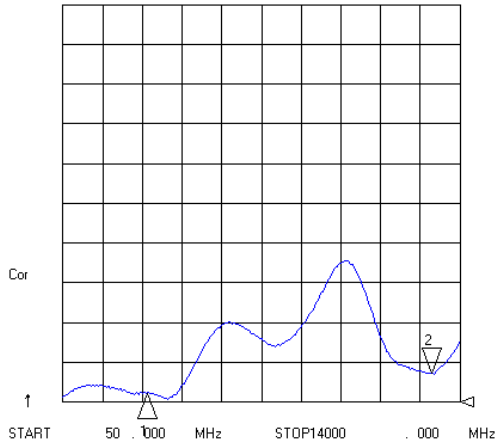

CH4 Markers
1: 1. 0233
3. 00000 GHz

START 2002-1-1 00:57:55