


建议开孔尺寸

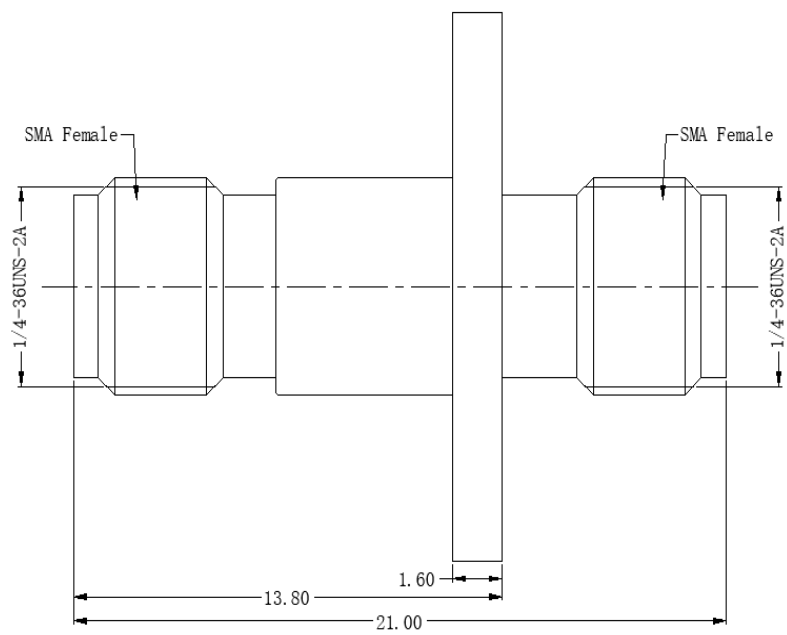

**Electrical & Environmental Characteristics**

|                                 |            |
|---------------------------------|------------|
| Impedance                       | 50 Ohm     |
| Insulation Resistance           | 5000 MΩ    |
| Operating Frequency             | DC~26.5GHz |
| Dielectric Withstanding Voltage | 1000V (DC) |
| VSWR                            | ≤1.20      |
| Insertion Loss                  | ≤0.30dB    |
| Operating Temperature           | - 55~+125℃ |

**Material & Coat-Plating**

|                 |                              |
|-----------------|------------------------------|
| Inner Conductor | BE-CU, Gold Plated           |
| Dielectric      | PTFE                         |
| Body            | Stainless steel, Passivation |

|                                       |  |                  |   |                    |                   |
|---------------------------------------|--|------------------|---|--------------------|-------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT |  | DWN              | Suzhou Talent Microwave, Inc  |                    |                   |
|                                       |  | CHK              |   |                    |                   |
| Unit<br>mm                            | TOLERANCES UNLESS OTHERWISE SPECIFIED<br>0 PLC ±0.25<br>1 PLC ±0.15<br>2 PLC ±0.12<br>3 PLC ±<br>3 PLC ±<br>ANGLES ±1° | APVD             | Product Model<br><br>SMA-KK-2FL<br>SMA Female to SMA Female with two<br>Flange Hole adaptor |                    |                   |
|                                       |  | PRODUCT SPEC     |   |                    |                   |
|                                       |  | APPLICATION SPEC |   |                    |                   |
| MATERIAL<br>SEE TABLE                 | FINISH<br>SEE TABLE  | WEIGHT           | SIZE<br>A4  | GAGE CODE<br>0T8L4 | DRAWING NO        |
| CUSTOMER DRAWING                      |  |                  |   |                    | SHEET1 OF 1 RVE 1 |