

Model:TLPA2G6G-30-33
Power Amplifier
2-6GHz, Gain:30dB, P1dB:33dBm
Feature:

- Ultra Wide Band:2-6GHz
- Gain:30dB Typ
- P1dB Output Power:33dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical Specifications:

参数Parameter	Min	Typ	Max	单位Units
频率范围 Frequency range	2-6			GHz
增益 Gain	30	33		dB
增益平坦度 Gain Flatness		±2	±2.5	dB
线性输出功率 Output P1dB	33	35		dBm
饱和输出功率 Output Psat		36		dBm
杂散 Spurious		-60		dBc
三阶交调 IP3		42		dBm
输入驻波 Input VSWR		1.6	2	:1
直流电压 DC Voltage		+28		V DC
直流电流 DC Supply Current		0.6	1	A
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:

参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	/	
尺寸 Size	80*67*12	mm
重量 Weight	/	g


绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+28V
输入功率 RF Input Power	0dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V


**Available 220V System
Benchtop Amplifier**

外形尺寸 Outline Drawing:

Unit: mm

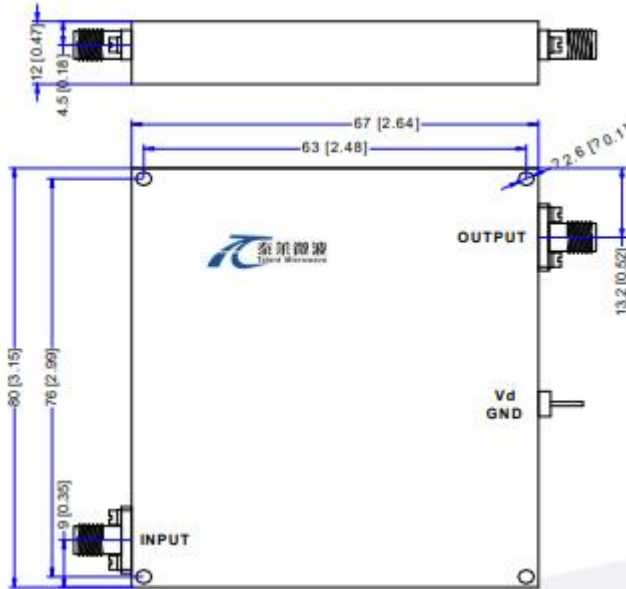

*****Heat Sink Required During Operation**



温度环境 Environmental Conditions:


参数Parameter	Min	Typ	Max	单位Units
操作温度 Operating Temperature	-20		+50	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity	100%RH at 35°C, 95%RH at 40°C			%
海拔 Altitude	50000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Part Number	描述 Description	版本号Revision
TLPA2G6G-30-33	Power amplifier 2-6GHz,Gain:33dB,Psat:36dBm,+28V DC,Without Heatsink.	Rev.1.1
TLPA2G6G-30-33-HS	Power amplifier 2-6GHz,Gain:33dB,Psat:36dBm,+28V DC,With Heatsink.	Rev.1.1

典型曲线 Typical Performance Data:


Input VSWR vs Frequency

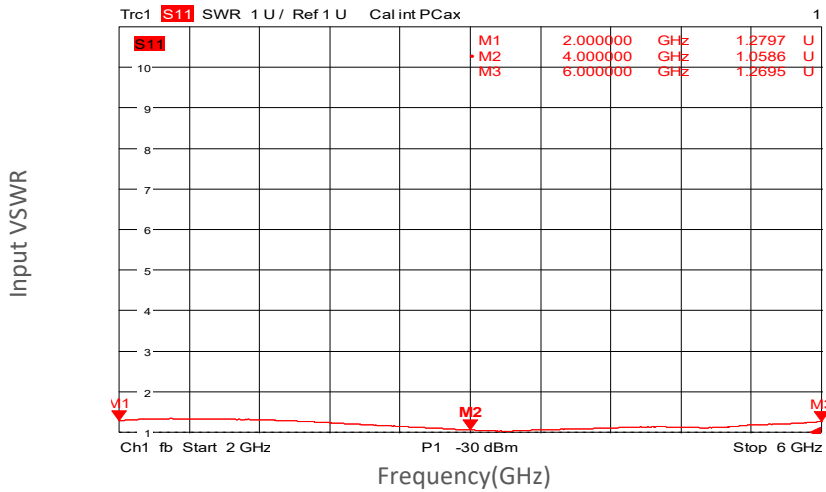

Gain vs Frequency

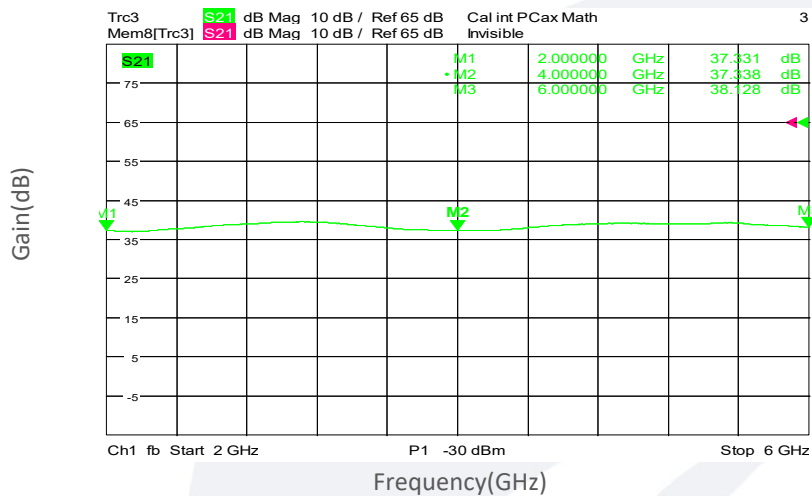


P1dB vs Frequency

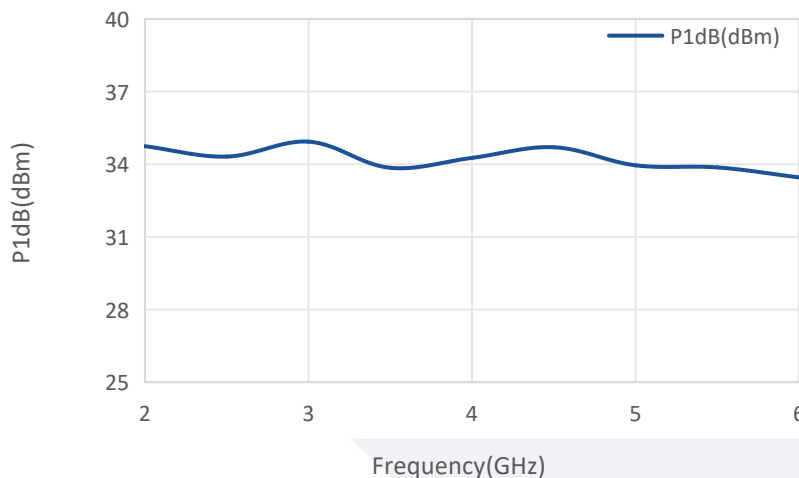

典型曲线 Typical Performance Data:

Psat vs Frequency

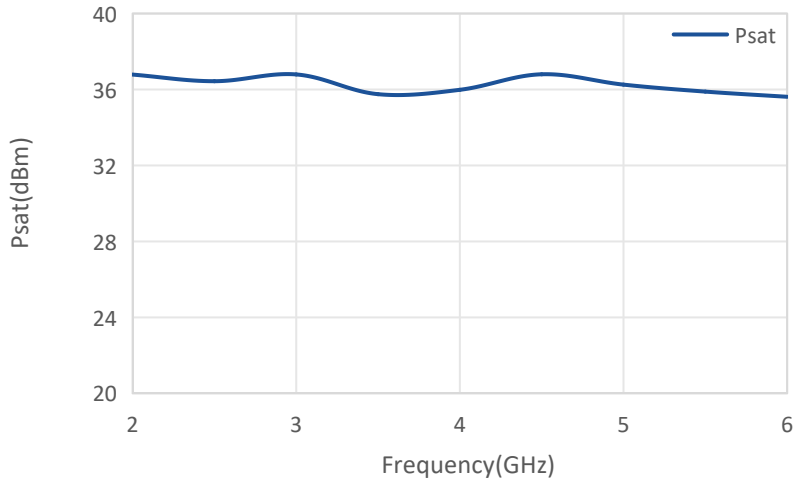

Harmonics vs Output Power

