

Model:TLPA18G26.5G-18-30
Power Amplifier
18-26.5GHz,Gain:18dB,P1dB:30dBm
Feature:

- Ultra Wide Band:1 8-26.5GHz
- Gain:18dB Min
- P1dB Output Power:30dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical Specifications:

参数Parameter	Min	Typ	Max	单位Units
频率范围 Frequency range	18-26.5			GHz
增益 Gain	18	21		dB
增益平坦度 Gain Flatness		±2	±2.5	dB
线性输出功率 Output P1dB	30	31		dBm
饱和输出功率 Output Psat		32		dBm
输入驻波 Input VSWR		2	2.2	:1
输出驻波 Output VSWR		2	2.2	:1
直流电压 DC Voltage		+12		V DC
直流电流 DC Supply Current		500		mA
阻抗 Impedance		50		Ohms

机械特性 Mechanical Specifications:

参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	2.92 Female/2.92 Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	50*25.4*8	mm
重量 Weight	200	g


绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+12V
输入功率 RF Input Power	15dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V


**Available 220V System
Benchtop Amplifier**

外形尺寸 Outline Drawing:

Unit: mm

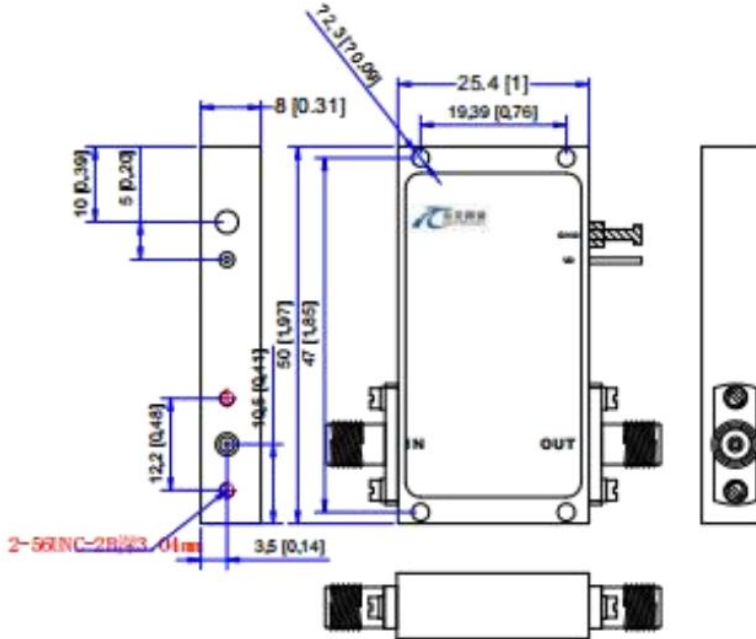

***Heat Sink Required During Operation



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:


参数Parameter	Min	Typ	Max	单位Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude		30,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Part Number	描述 Description	版本号Revision
TLPA18G26.5G-18-30	Power amplifier 18-26.5GHz,Gain:18dB,Psat:32dBm,+12V DC,Without Heatsink.	Rev.1.1
TLPA18G26.5G-18-30-HS	Power amplifier 18-26.5GHz,Gain:18dB,Psat:32dBm,+12V DC,With Heatsink.	Rev.1.1

典型曲线 Typical Performance Data:


VSWR&Gain vs Frequency

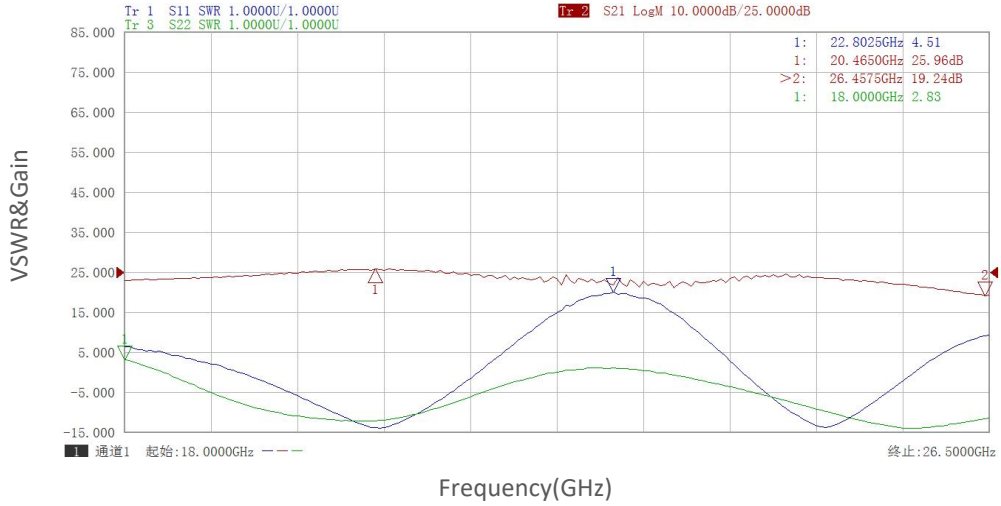

Gain vs Output Power

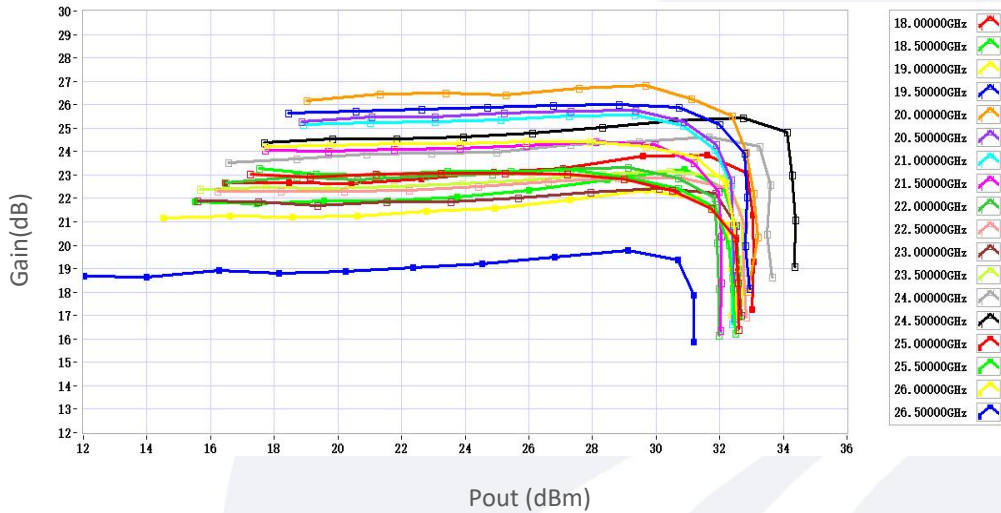

Gain vs Frequency

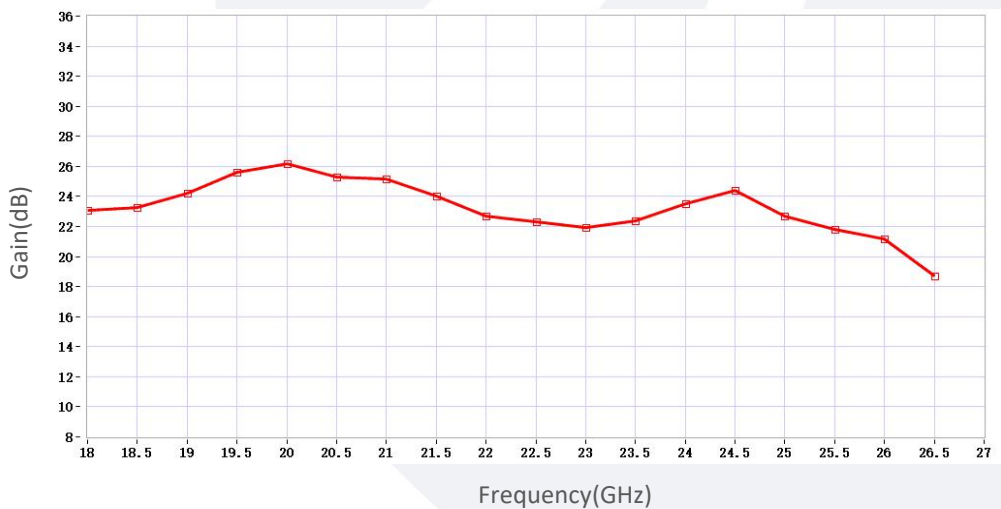

典型曲线 Typical Performance Data:

P1dB vs Frequency

