

**型号 Part No : RT150-4-N**

DC-4GHz,150W,N FeMale Coaxial Fixed Terminations

**电气特性 Electrical Specifications:**

工作频率 Frequency Range:	DC-4GHz
驻波 VSWR:	≤1.3
耐功率 RF Power Handling:	≤150Watts Average at 25°C
阻抗 Impedance:	50 Ohms




**机械特性 Mechanical Specifications:**

操作温度 Operation Temperature:	-55°C - +125°C
存储温度 Storage Temperature:	-55°C - +125°C
壳体 Body Material:	Nickel plated Brass
中心导体 Center Conductor:	Brass, Golden
接口 Connectors:	N;7/16 FeMale
相对湿度 Relative Humidity:	≤90%

**外形尺寸 Outline Drawing:**

Unit: mm

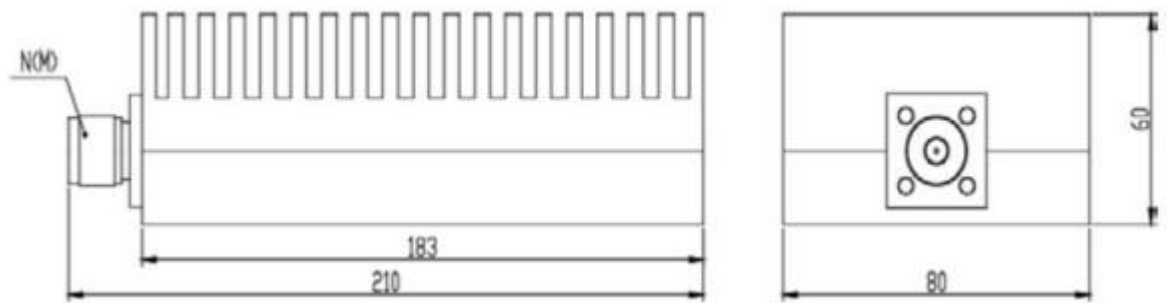

Note:

Nominal impedance: 50Ω

Average power: 150W (corresponding to the ambient temperature of 25° C, when the temperature rises to 125° C, the power linearly decreases to 15W).

Peak power: 10KW (5μs pulse width,1% load cycle)

Connector form: N,7/16

★ Dimensions and specifications correspond to N-type connections unless otherwise specified

**订货信息 Ordering Information:**

标准型号 Part Number	描述 Description
RT150-4-N	DC-4GHz,150W,N FeMale Coaxial Fixed Termination