

**型号 Part No : TT200-6-N**

DC-6GHz,200W,N Female/Male Coaxial Fixed Terminations

**电气特性 Electrical Specifications:**


|                        |                           |
|------------------------|---------------------------|
| 工作频率 Frequency Range:  | DC-6 GHz                  |
| 驻波 VSWR:               | DC-3GHz, ≤1.20 @Max       |
|                        | DC-4GHz, ≤1.25 @Max       |
|                        | DC-6GHz, ≤1.35 @Max       |
| 耐功率 RF Power Handling: | ≤200Watts Average at 25°C |
| 阻抗 Impedance:          | 50 Ohms                   |

**机械特性 Mechanical Specifications:**

|                             |                                    |
|-----------------------------|------------------------------------|
| 操作温度 Operation Temperature: | -55°C - +100°C                     |
| 存储温度 Storage Temperature:   | -55°C - +100°C                     |
| 壳体材质 Body Material:         | Black, Finned Aluminum             |
| 中心导体 Center Conductor:      | Gold-plated, Phosphor bronze       |
| 接口 Connectors:              | N Female/Male, Nickel plated Brass |
| 重量 Weight:                  | 1.7Kg                              |

**外形尺寸 Outline Drawing:**

Unit: mm

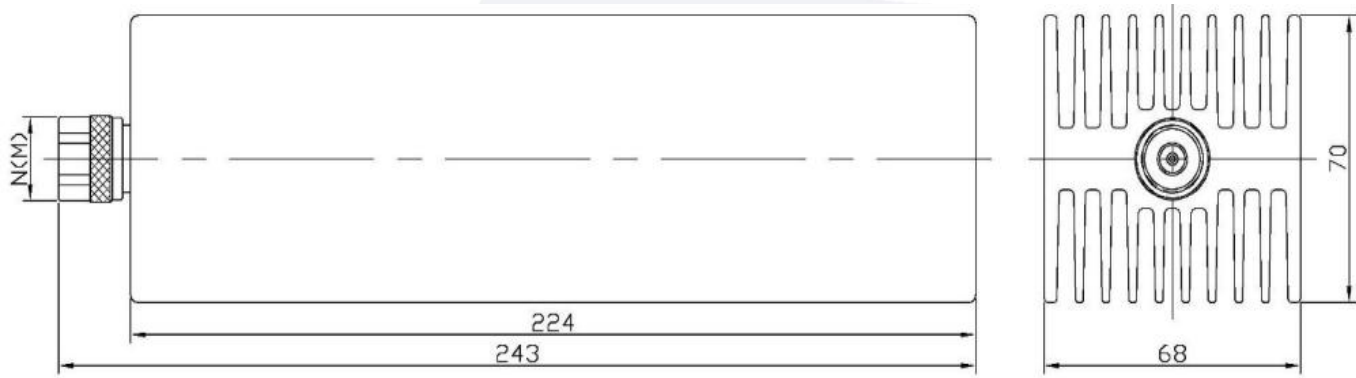

**订货信息 Ordering Information:**

| 标准型号 Part Number | 描述 Description                                       |
|------------------|--|
| TT200-6-N        | DC-6GHz,200W,N Female/Male Coaxial Fixed Termination |