

**Model: TMPA-092096-3733-10**
**Power Amplifier**  
**92-96GHz, Gain:37 dB, Psat:33 dBm**
**Feature:**

- Frequency Range: 92-96 GHz
- Gain:37 dB Type
- Output Power Psat:33 dBm Type
- Good Power and Gain Flatness

**电气特性 Electrical Specifications:**

参数Parameter	Min	Typ	Max	单位Units
频率范围 Frequency range	92-96			GHz
增益 Gain		37		dB
饱和输出功率 Output Psat		33		dBm
输入驻波 Input VSWR		1.5		:1
输出驻波 Output VSWR		1.5		:1
直流电压 DC Voltage		24		V DC
直流电流 DC Supply Current		1700		mA

**机械特性 Mechanical Specifications:**

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	WR-10/UG-387/U	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	54*68*87(With Heatsink)	mm
重量 Weight	/	g


**绝对最大值 Absolute Maximum Ratings:**

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+28V
输入功率 RF Input Power	TBD
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V


**Available 220V System  
 Benchtop Amplifier**

外形尺寸 Outline Drawing:

Unit: mm

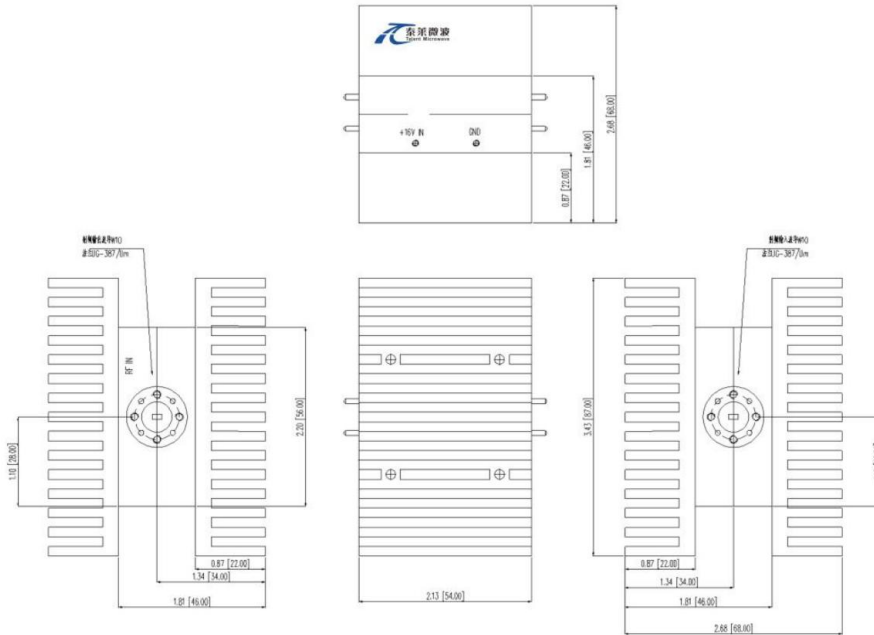

温度环境 Environmental Conditions:



OBSERVE PRECAUTIONS  
ELECTROSTATIC SENSITIVE  
DEVICES

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-10		+65	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号 Revision
TMPA-092096-3733-10	Power Amplifier, 92-96 GHz, Gain:37 dB Type, Psat:33 dBm Type, 20V DC,WR-10	Rev.1.1