

## Low Noise Amplifier

0.1-18GHz /3.0dB NF/12dB Gain/8 dBm P1dB

Model: TLLA0.1G18G-12-30

TLLA0.1G18G-12-30 is a low noise amplifier with a small signal gain of 12 dB and a nominal noise figure of 3.0 dB across the frequency range of 0.1 to 18 GHz. The DC power requirement for the amplifier is +15 V DC/125 mA. The input and output port configuration offers coax adapter structure with SMA female.

### Features:

- Ultra Wide Band:0.1-18GHz
- Gain: 12dB Min
- Noise Figure: 3.0dB Max
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Communication systems

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	0.1		18	GHz
增益 Gain	12			dB
增益平坦度 Gain Flatness			±2.0	dB
噪声系数 Noise Figure			3.0	dB
线性输出功率 Output P1dB	8			dBm
输入驻波 Input VSWR		2.0	2.5	:1
输出驻波 Output VSWR		2.0	2.5	:1
直流电压 DC Voltage		15		V DC
直流电流 DC Supply Current		125		mA
阻抗 Impedance		50		Ohms

## 机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	17.78*10.9*4.57	mm
重量 Weight	/	g

## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

## 外形图 Outline Drawing:

Unit:mm

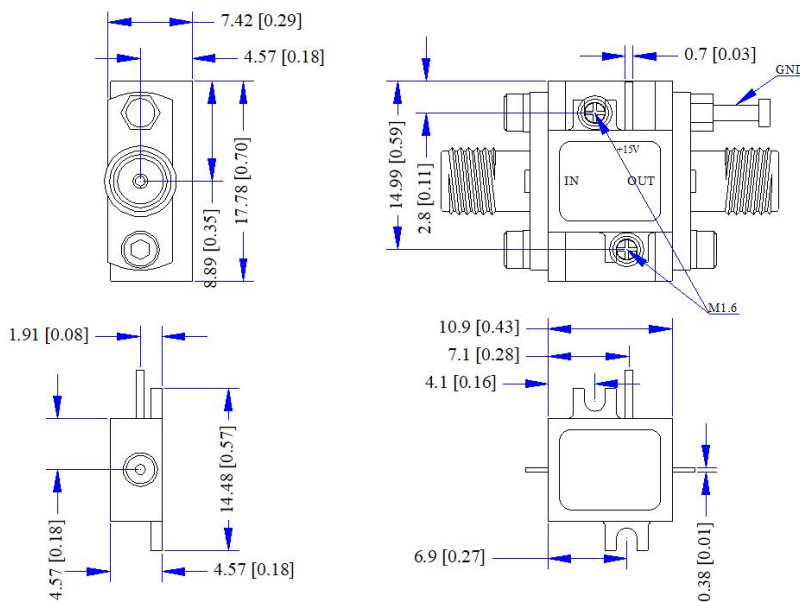

**\*\*\*Heat Sink Required During Operation**



OBSERVE PRECAUTIONS  
ELECTROSTATIC SENSITIVE  
DEVICES

## 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-30		+75	°C
存储温度 Non-operating Temperature	-45		+85	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

## 订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLLA0.1G18G-12-30	Low Noise Amplifier, 0.1-18GHz, Noise Figure:3.0dB, Gain:12 dB,P1dB:8dBm,+15V DC,Without Heatsink	Rev.1.1
TLLA0.1G18G-12-30-HS	Low Noise Amplifier, 0.1-18GHz, Noise Figure:3.0dB, Gain:12 dB,P1dB:8dBm,+15V DC,With Heatsink	Rev.1.1