

E-band High Dynamic Range Electrical Attenuator

WR-12/60-90GHz/36dB Attenuation range

Model:TLVA060090-36-12

TLVA060090-36-12 is a E-band electrical attenuator. The attenuator exhibits 36 dB nominal attenuation range across the frequency range of 60 to 90 GHz. The control voltage of the standard model is -5 to 0 VDC. The RF input and output ports are WR-12 waveguides with UG-387/U-M anti-cocking flanges, and solder pin provides the control signal.

Features:

- Operating Frequency 60 to 90 GHz
- High Dynamic Range

Applications:

- THz Systems
- Testing Equipment

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	60		90	GHz
衰减范围 Attenuation Range		36		dB
插损 Insertion Loss @Control voltage=-5V		5		dB
输入驻波 Input VSWR		2.0		:1
控制电压 Control Voltage	-5		0	V DC


环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	0 To +50	℃
存储温度 Storage Temerature	0 to +50	℃
输入/输出接口 Input /Output Connector	WR-12/UG-387/U	
尺寸 Size	30*20*20	mm

绝对最大值 Absolute Maximum Ratings :

描述 Description	参数 Parameter	单位 Units
射频输入功率 RF Input Power	+15	dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V	

外形图 Outline Drawing: Unit:mm

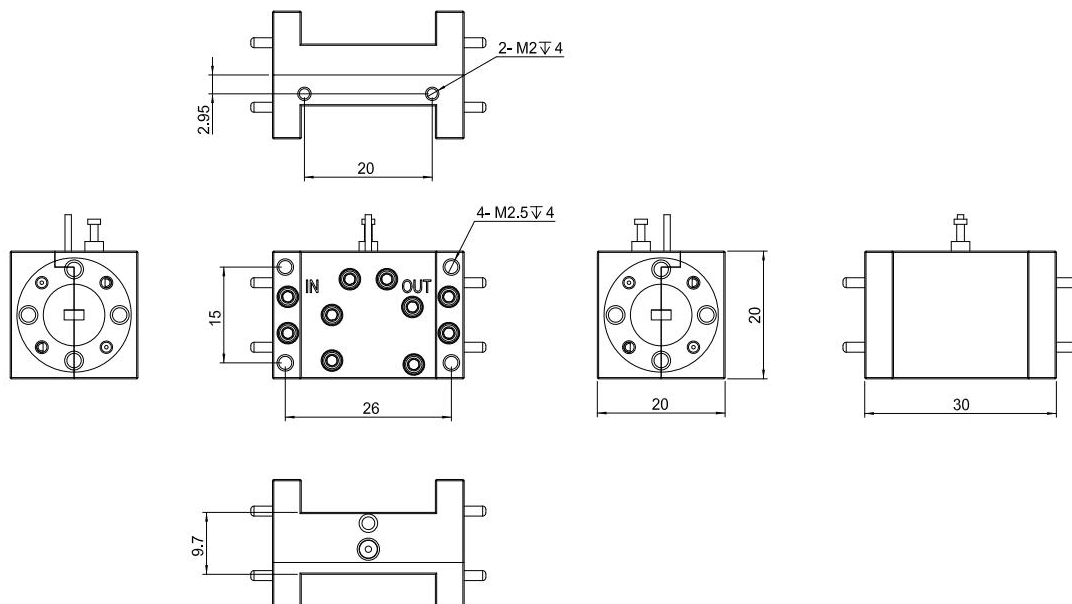


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:


标准型号 Base Number	描述 Description
TLVA060090-36-12	E-band High Dynamic Range Electrical Attenuator 60-90 GHz, 36dB Attenuation Range, WR-12

典型曲线 Typical Performance Data:

Attenuation@Voltage

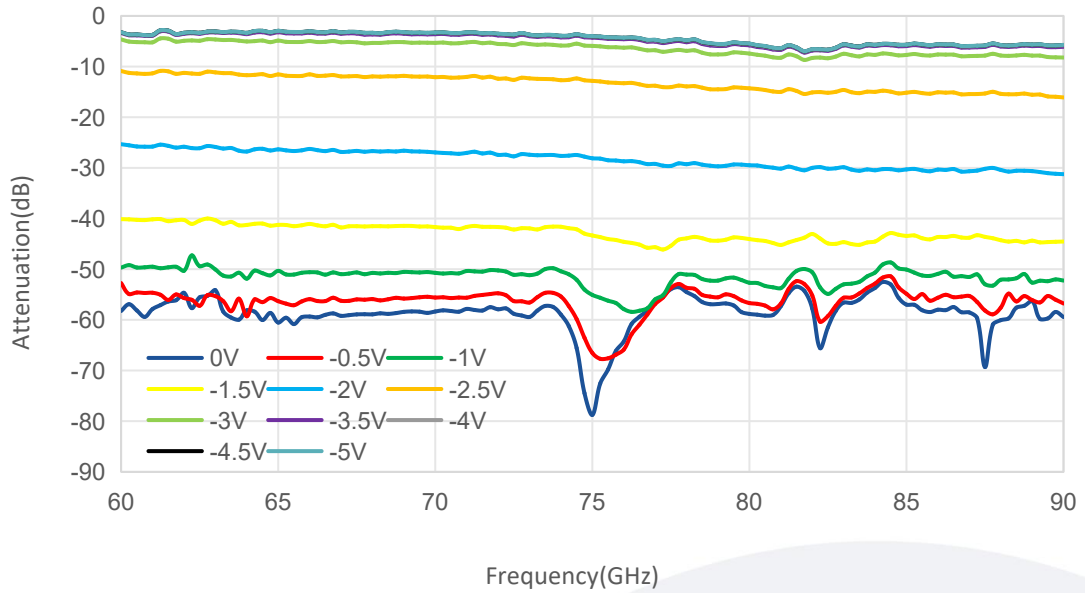


Input VSWR@Voltage

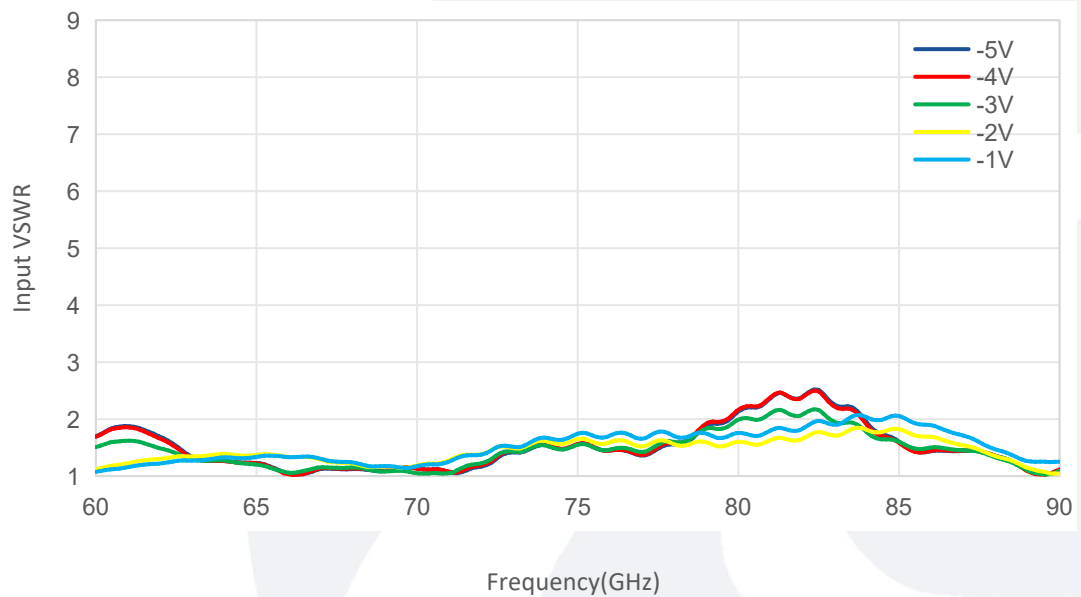

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

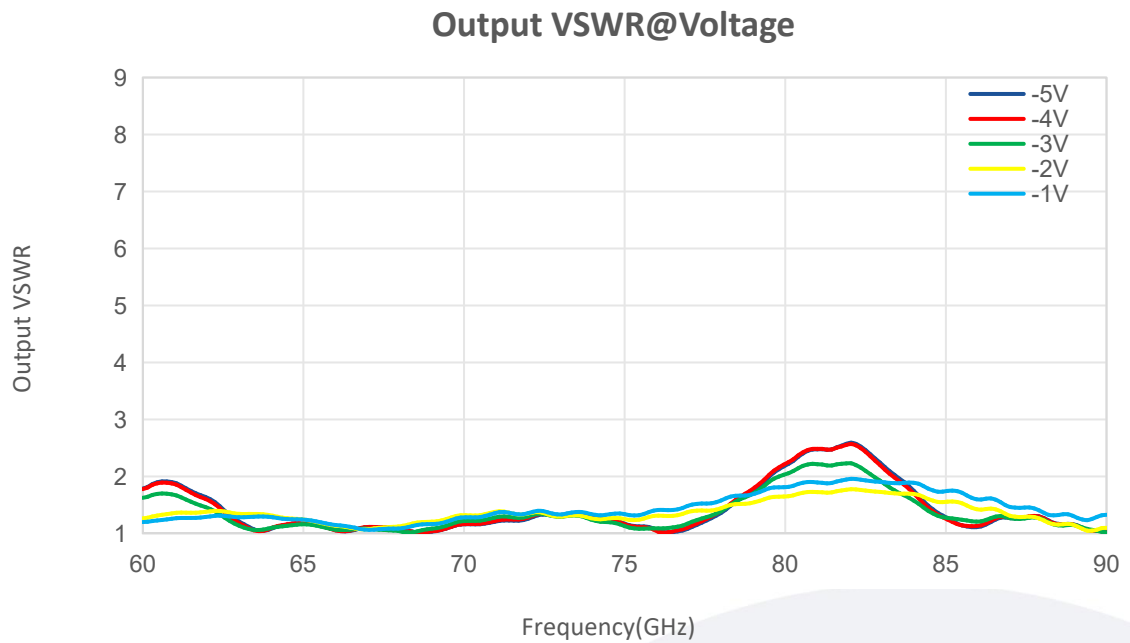

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.