

Active Frequency Multiplier

WR-12/X6/70-80GHz/28dBm Output Power

Model: TMAM-070080-0628-12

TMAM-070080-0628-12 is an active X6 frequency multiplier. The multiplier has an input frequency of 11.66 to 13.34 GHz with a typical input power of +5 dBm and an output frequency of 70 to 80GHz with a typical output power of +28 dBm. The DC power requirement for the multiplier is +17 V DC/670 mA. The input port configuration is a female SMA connector and the output is a WR-12 waveguide with a UG-387/U-M anti-cocking flange.

Features:

- Output Frequency:70-80GHz
- Output Power :28dBm Typ
- Low power consumption

Applications:

- Frequency Extenders
- THz Systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
输出频率 Output Frequency	70		80	GHz
输出功率 Output Power		28		dBm
输入频率 Input Frequency	11.66		13.34	GHz
输入功率 Input Power	3	5	7	dBm
谐波抑制 Harmonic		-20		dBc
倍频次数 Multiply Factor		6		
供电电压 DC Voltage		17		V
供电电流 DC Supply Current		670		mA

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输出接口 Output Connector	WR-12/UG-387/U	
输入接口 Input Connector	SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	50*28*23(Without Heatsink) 50*70*43(With Heatsink)	mm

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+17.5 V
输入功率 RF Input Power	+10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm

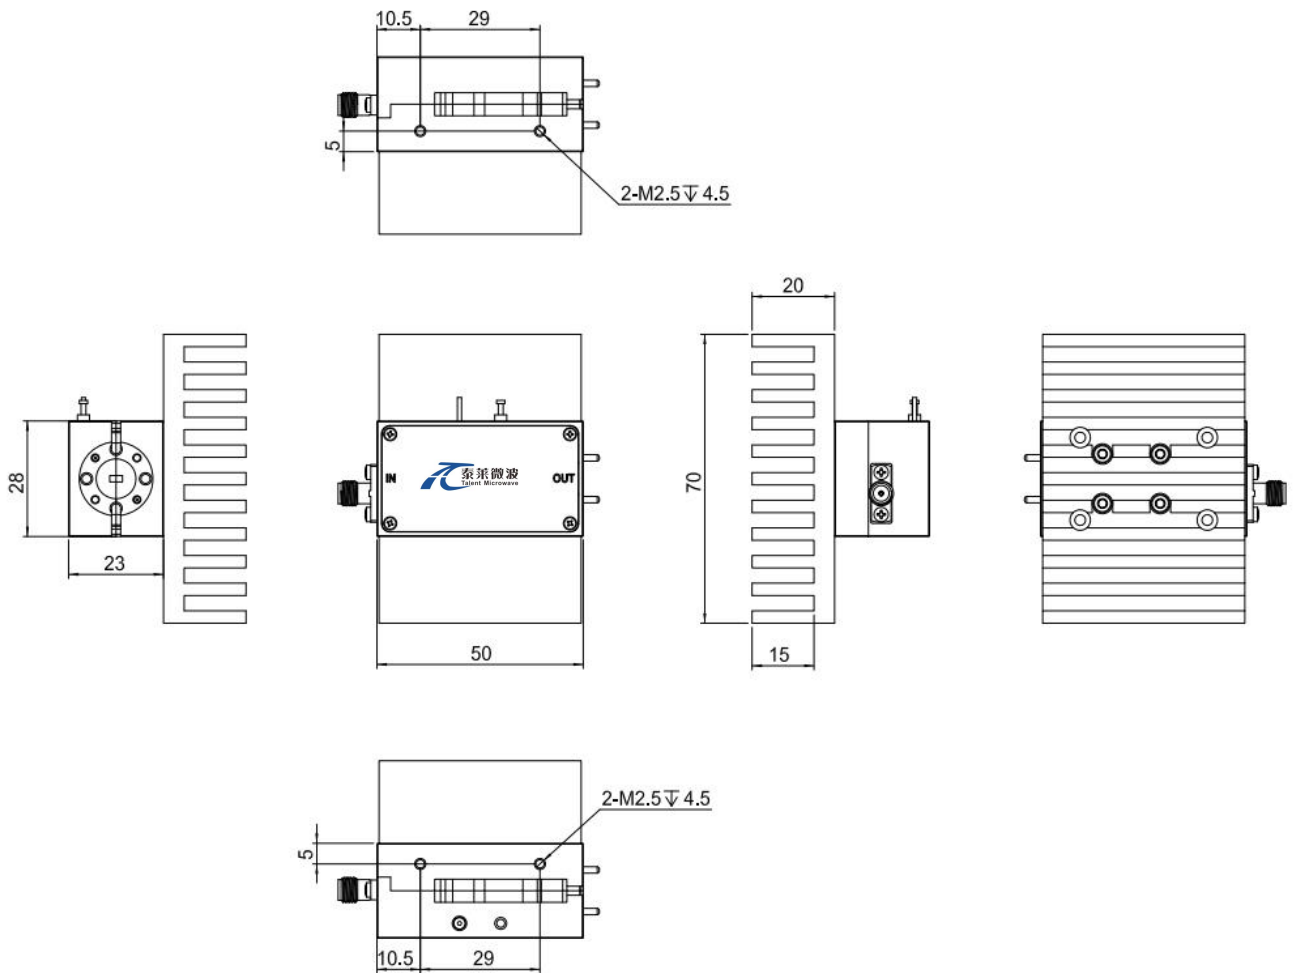

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.


温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-10		+65	℃
存储温度 Non-operating Temperature	-45		+85	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TMAM-070080-0628-12	Active Multiplier,X6,70-80GHz, Output Power:28dBm,WR-12/UG-387/U,SMA Female	Rev.1.1


典型曲线 Typical Performance Data:

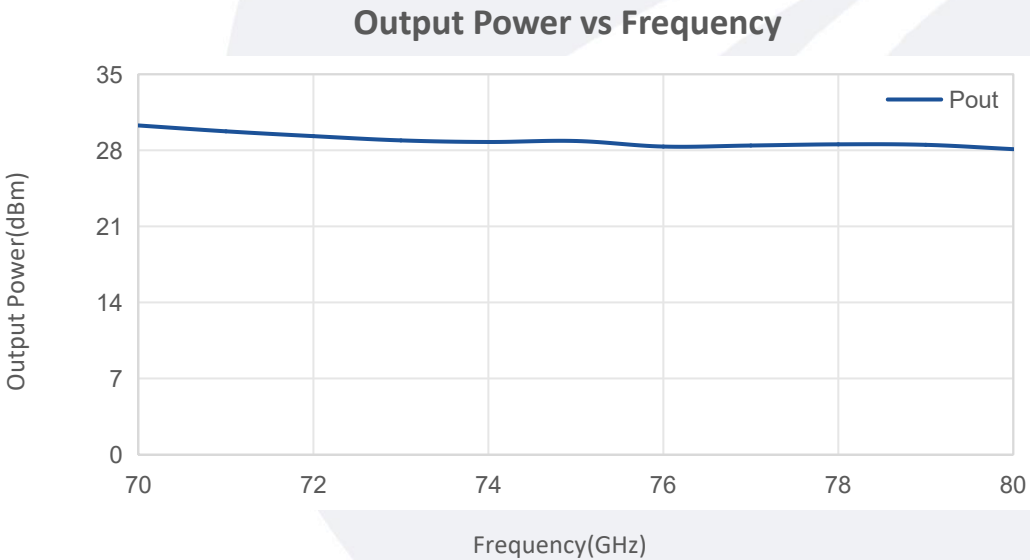

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Harmonic Suppression vs Frequency

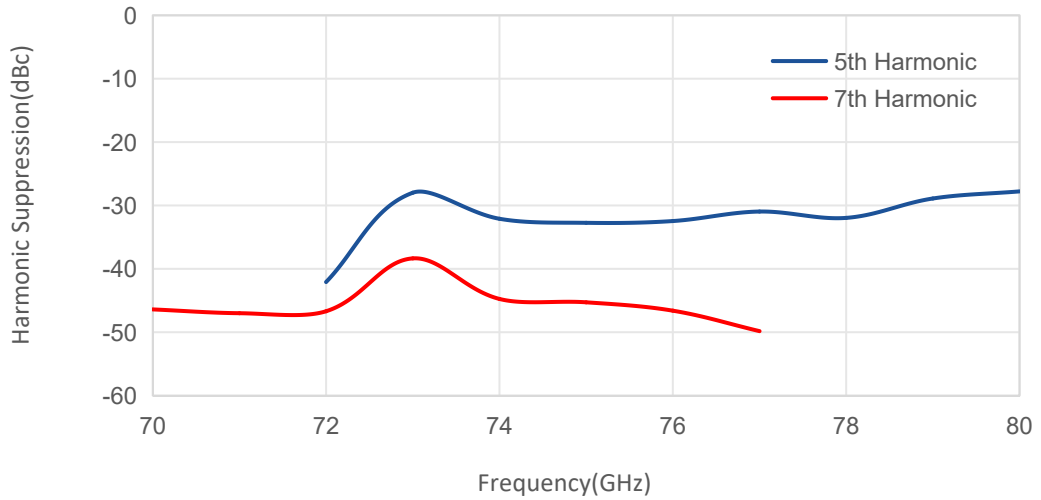

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.