

**Part No: RAXXA2-N-18**

**N Attenuators • Male to Female • DC – 18 GHz -2W**

**电气特性 ELECTRICAL**


- **Frequency Range** DC – 18GHz
- **Attenuation (dB)**
  - 1 through 9 ± 1.0 dB
  - 10 .....± 1.0 dB
  - 20 ..... ± 1.2 dB
  - 30 ..... ± 1.2 dB
  - 40 ..... ± 1.2 dB
  - 50 ..... ± 1.2 dB
- **VSWR (MAX)**
  - DC – 4 GHz.....1.20 : 1
  - 4 - 8 GHz.....1.30 : 1
  - 8 - 12.4 GHz.....1.35 : 1
  - 12.4 - 18 GHz....1.40 : 1
- **Impedance** 50 Ohms
- **RF Power Nominal** 2 Watts Average at 25°C  
 PEAK: 500 Watts  
 (5 μSec Pulse Width , 0.4% Duty Cycle)

**机械特性 MECHANICAL**

- **Temperature Range** -55°C - +125°C
- **Connectors** Brass , Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

**订货信息 ORDER**

Model Number : RAXXA2-N-18  
 |

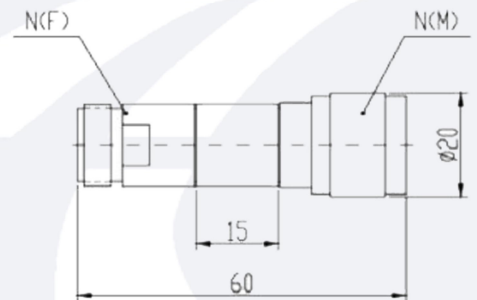

**Connector: N and TNC are optional.**  
 Unit : mm