

**Model:TLPA10M1G-35-40**
**Power Amplifier**
**10MHz-1GHz, Gain:35dB, Psat:40dBm**
**Feature:**

- Ultra Wide Band: 10MHz-1GHz
- Gain: 35dB Typ
- Psat Output Power: 40 dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

**电气特性 Electrical Specifications:**

参数Parameter	Min	Typ	Max	单位Units
频率范围 Frequency range	0.01-1			GHz
增益 Gain	32	35		dB
增益平坦度 Gain Flatness		±2	±3	dB
线性输出功率 Output P1dB	37	38		dBm
饱和输出功率 Output Psat	39	40		dBm
谐波抑制 Harmonics			-10	dBc
输入驻波 Input VSWR		1.5	2.0	:1
直流电压 DC Voltage	26	28	30	V DC
直流电流 DC Supply Current		0.2	1.5	A
阻抗 Impedance	50			Ohms

**机械特性 Mechanical Specifications:**

参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	76*48*15	mm
重量 Weight	250	g


**绝对最大值 Absolute Maximum Ratings:**

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	30V
输入功率 RF Input Power	10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V


 Available 220V System  
 Benchtop Amplifier

外形尺寸 Outline Drawing:

Unit: mm

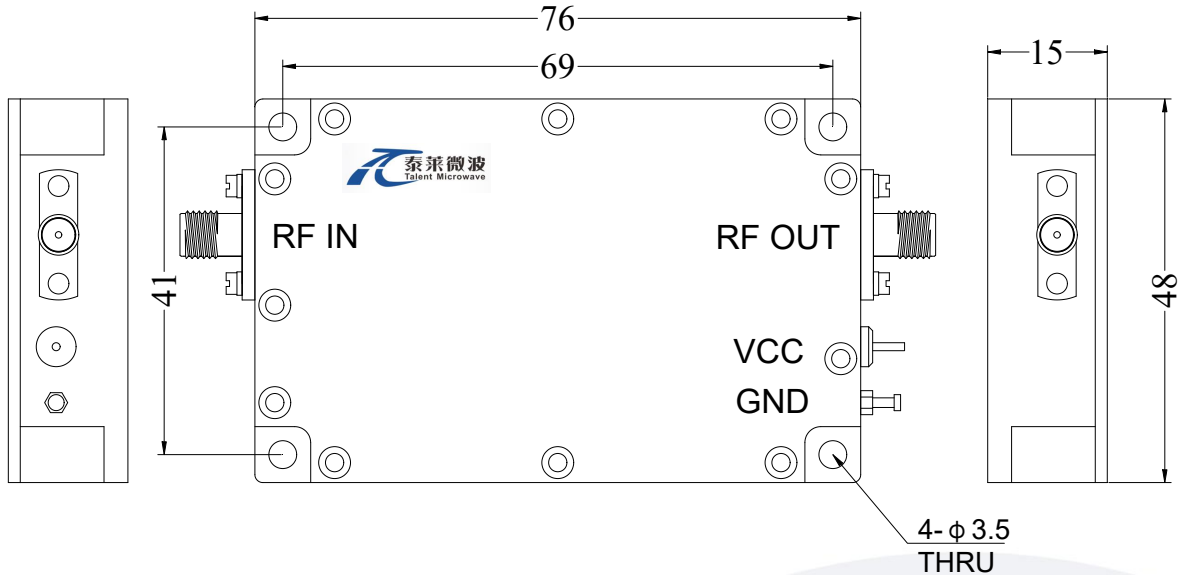

**\*\*\*Heat Sink Required During Operation**



温度环境 Environmental Conditions:


参数Parameter	Min	Typ	Max	单位Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	30,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Part Number	描述 Description	版本号Revision
TLPA10M1G-35-40	Power amplifier 10MHz-1GHz,Gain:35dB,Psat:40dBm,28V DC, Without Heatsink	Rev.1.0
TLPA10M1G-35-40-HS	Power amplifier 10MHz-1GHz,Gain:35dB,Psat:40dBm,28V DC, With Heatsink	Rev.1.0

典型曲线 Typical Performance Data:


### Input VSWR vs Frequency

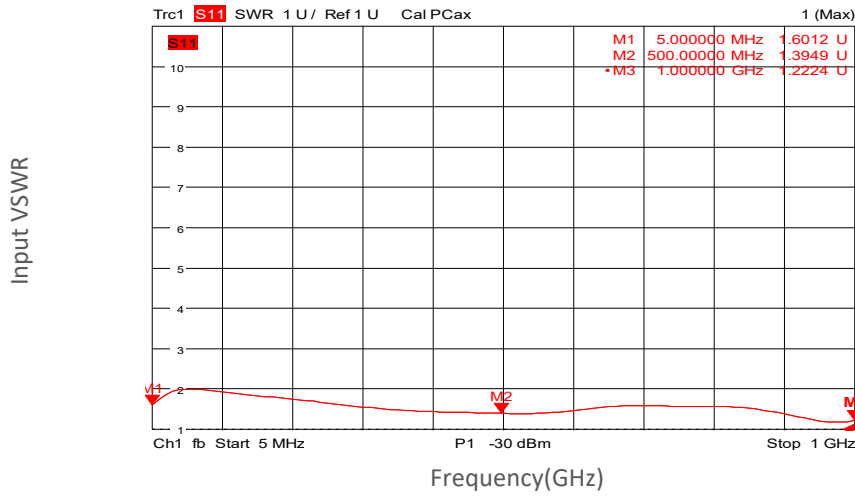

### Gain vs Frequency

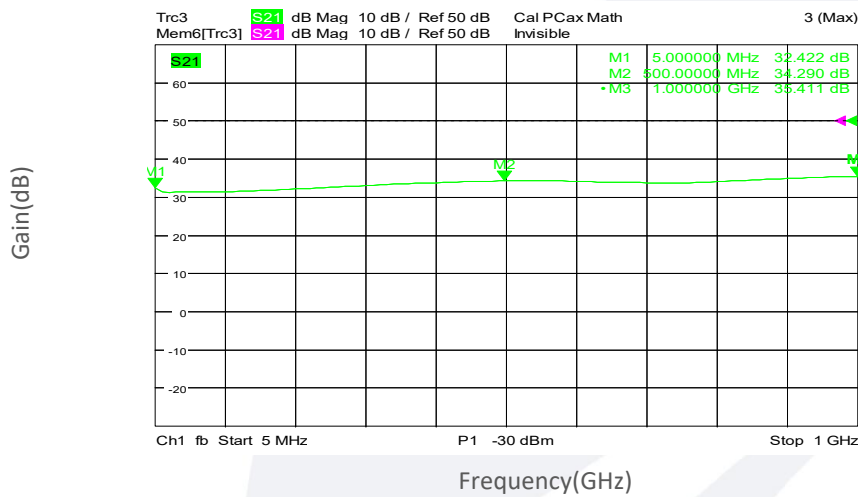


### Gain vs Output Power

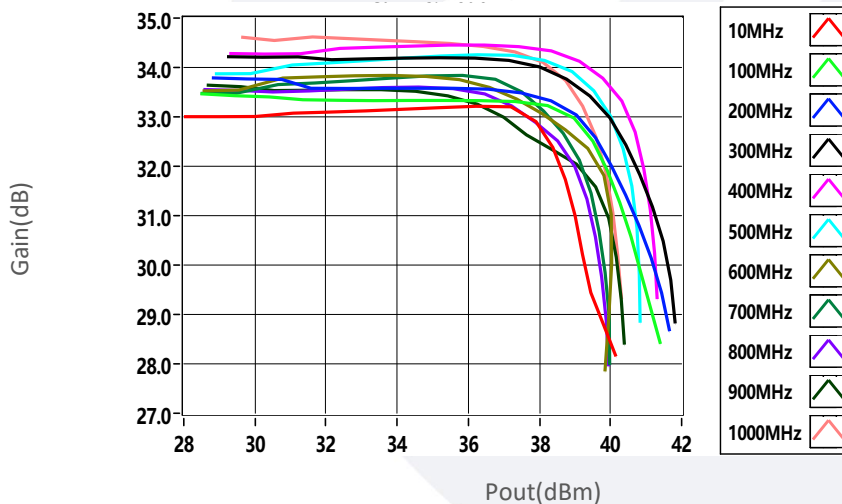


典型曲线 Typical Performance Data:


**P1dB&P3dB vs Frequency**

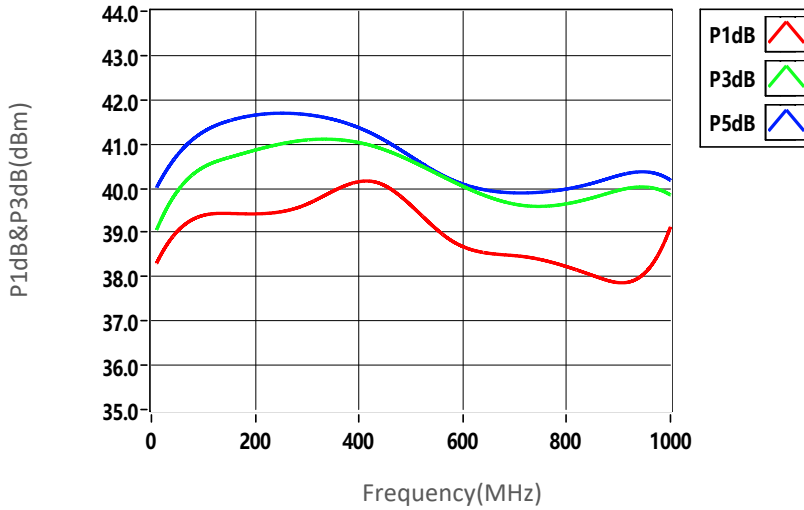

**Psat VS Frequency**

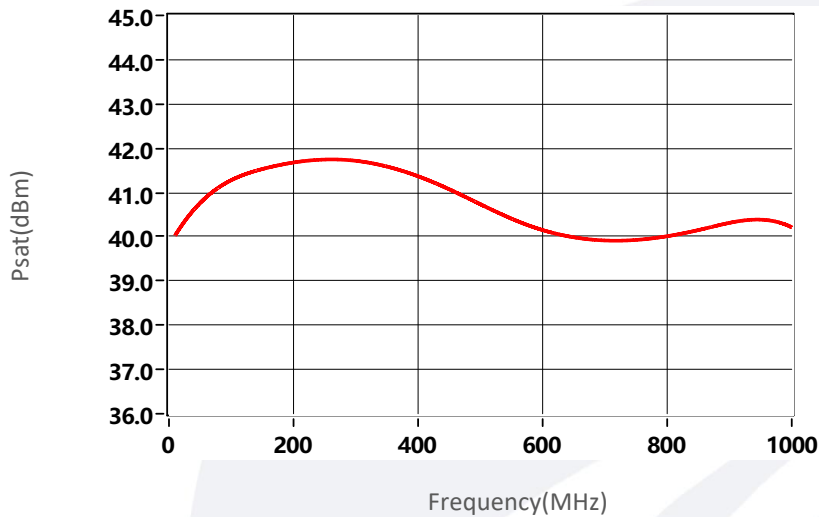

**2nd Harmonics VS Output Power**

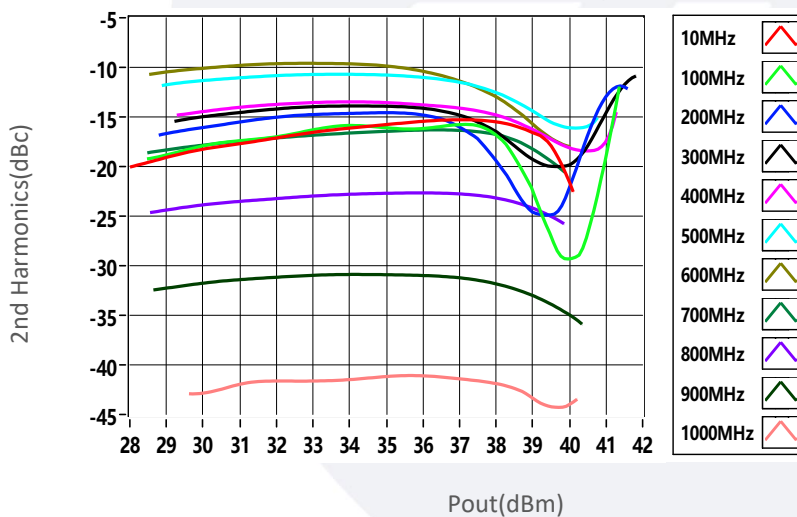

典型曲线 Typical Performance Data:

3rd Harmonics VS Output Power

