

Model:TLLA5G11G-19-30
Low Noise Amplifier
5-11GHz, NF:2.5dB, Gain:19dB,P1dB:16dBm
Feature:

- Ultra Wide Band: 5-11GHz
- Gain: 19dB Typ
- Noise Figure: 2.5dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical Specifications:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range		5-11		GHz
增益 Gain		19		dB
增益平坦度 Gain Flatness		±1.5		dB
噪声系数 Noise Figure		2.5		dB
线性输出功率 Output P1dB		16		dBm
输入驻波 Input VSWR		1.7		:1
输出驻波 Output VSWR		1.5		:1
直流电压 DC Voltage		8	12	V DC
直流电流 DC Supply Current		80		mA
阻抗 Impedance		50		Ohms

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	20*30*8	mm
重量 Weight	/	g


绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+12V
输入功率 RF Input Power	TBD
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V


**Available 220V System
Benchtop Amplifier**

外形尺寸 Outline Drawing:

Unit: mm

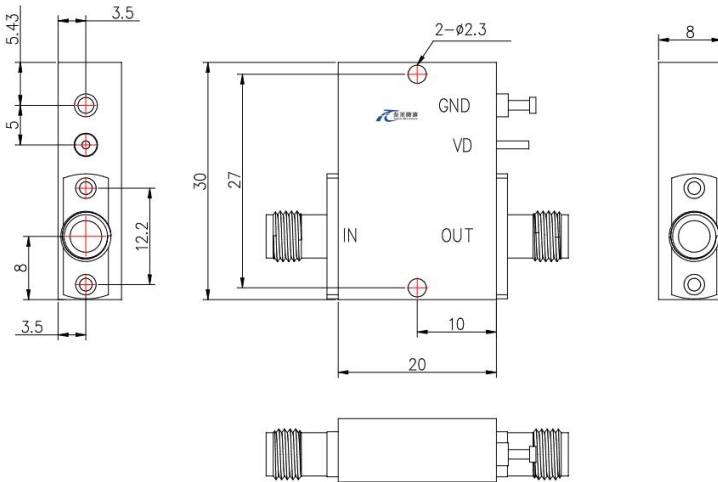

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-40		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Part Number	描述 Description	版本号 Revision
TLLA5G11G-19-30	Low Noise Amplifier, 5-11GHz, Noise Figure:2.5dB, Gain:19 dB,P1dB:16dBm,+8V DC,Without Heatsink	Rev.1.1
TLLA5G11G-19-30-HS	Low Noise Amplifier, 5-11GHz, Noise Figure:2.5dB, Gain:19 dB,P1dB:16dBm,+8V DC,With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:

Gain&VSWR vs Frequency

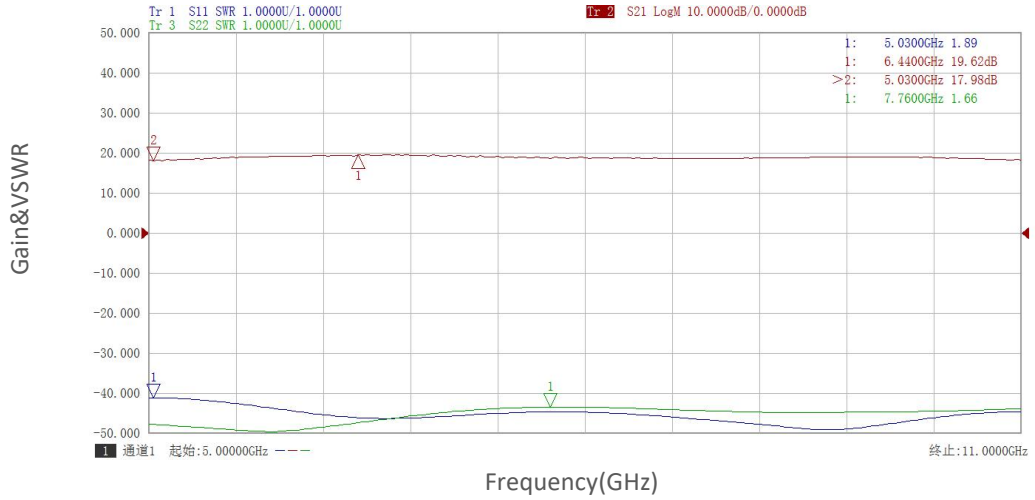

Noise Figure vs Frequency

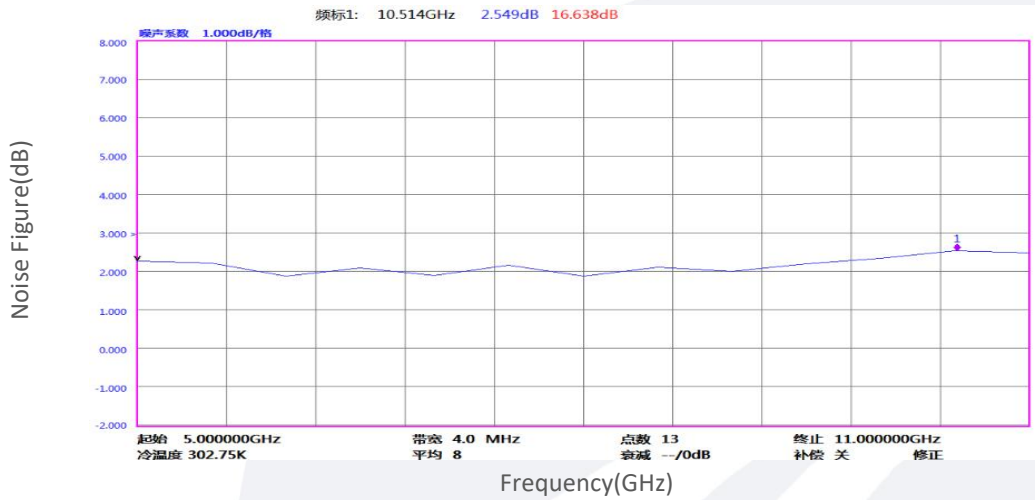

P1dB vs Frequency

