

Power Amplifier

6-18GHz /47dB Gain/48 dBm Psat

Model: TLPA6G18G-47-48

TLPA6G18G-47-48 is a power amplifier with a typical small signal gain of 47 dB and a nominal Psat of 48 dBm across the frequency range of 6 to 18 GHz. The DC power requirement for the amplifier is +28 VDC/800 W. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Ultra Wide Band: 6-18GHz
- Gain: 47dB Min
- Output Power Psat: 48dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	6-18			GHz
功率增益 Power Gain	47			dB
增益平坦度 Gain Flatness		±3.5		dB
饱和输出功率 Output Psat	47	48		dBm
杂散 Spurious@Pout=47dBm			-50	dBc
谐波 Harmonic@Pout=47dBm		-13		dBc
输入驻波 Input VSWR			2	:1
直流电压 DC Voltage		28		V DC
功耗 Power Consumption		800		W
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	J30J-9ZKP	
尺寸 Size	255*200*107.4	mm
重量 Weight	500	g

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+30 V
输入功率 RF Input Power	+10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm

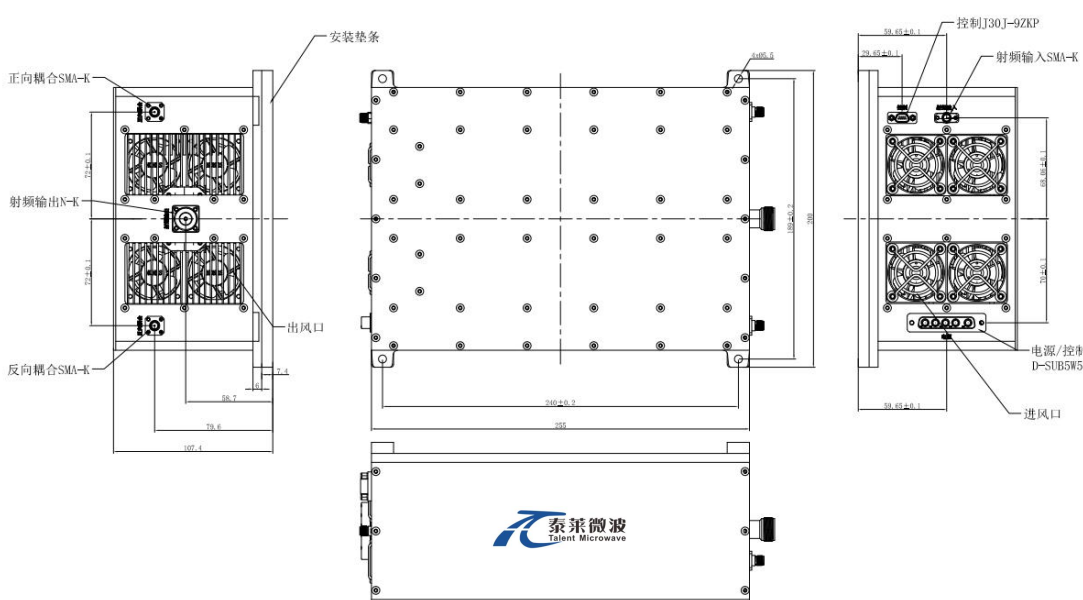

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

供电接头 Supply Connector(J30J-9ZKP):

J30J-9ZKP	
引脚 Pin	功能 Function
1	EN
2	TEM sensor
3	Voltage monitoring
4	Current monitoring
5	GND
6~9	NC

温度环境 Environmental Conditions:




参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-20		+40	°C
存储温度 Non-operating Temperature*	-30		+50	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLPA6G18G-47-48	Power amplifier 6-18GHz,Gain:47dB,Psat:48dBm, +28V DC,Without Heatsink	Rev.1.1
TLPA6G18G-47-48-HS	Power amplifier 6-18GHz,Gain:47dB,Psat:48dBm, +28V DC,With Heatsink	Rev.1.1


典型曲线 Typical Performance Data:

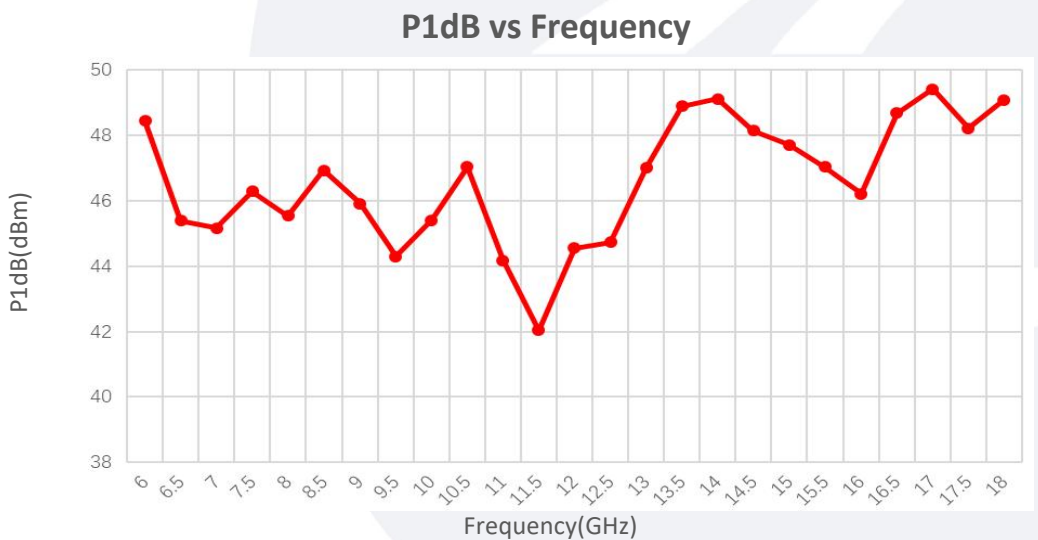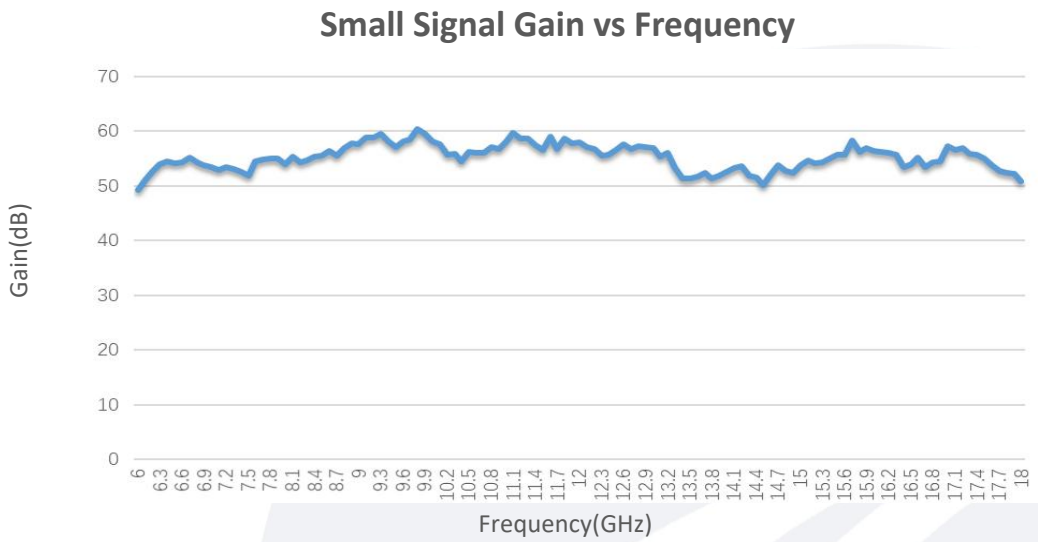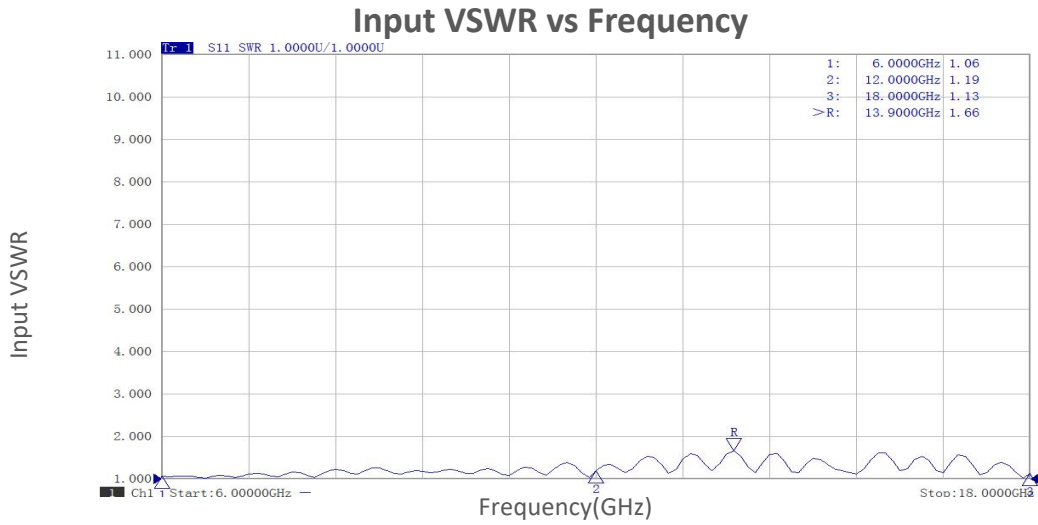


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Pout@Pin

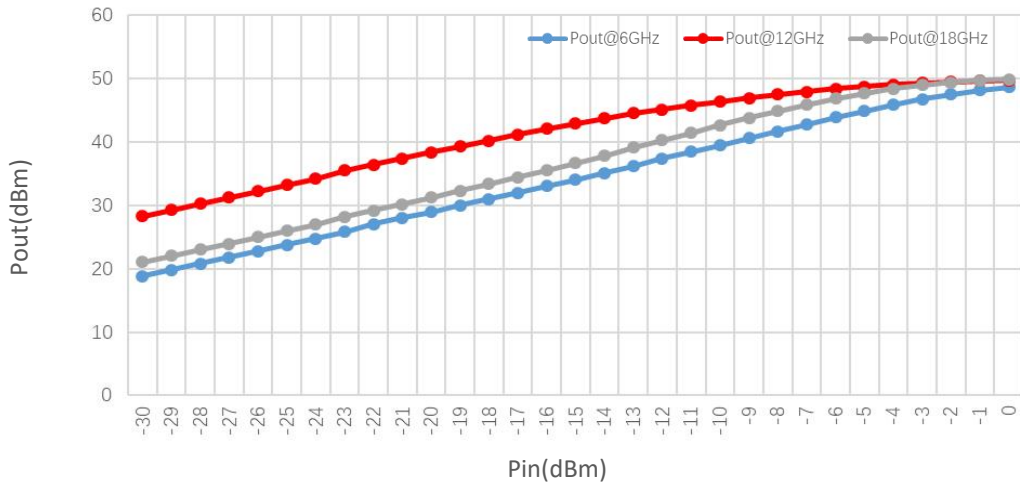

Pout@Equal_Pin

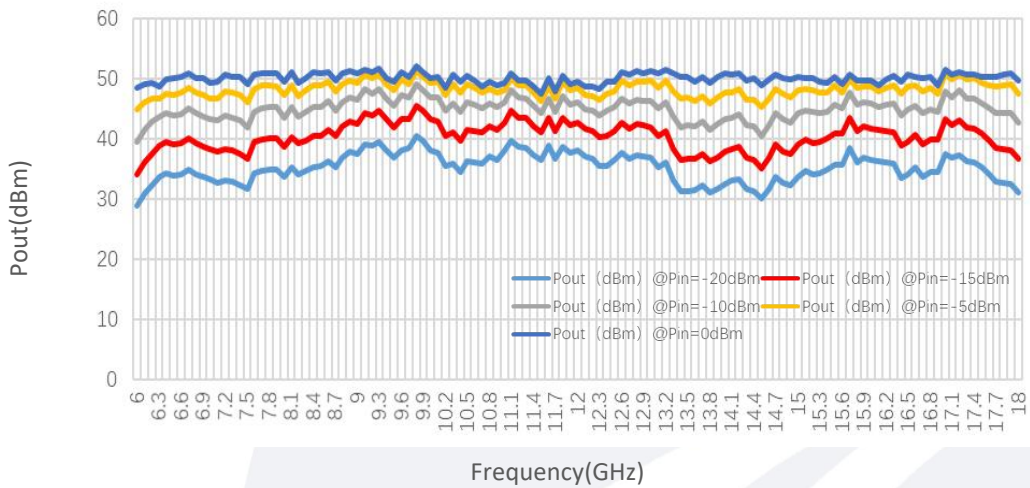


Spurious vs Frequency

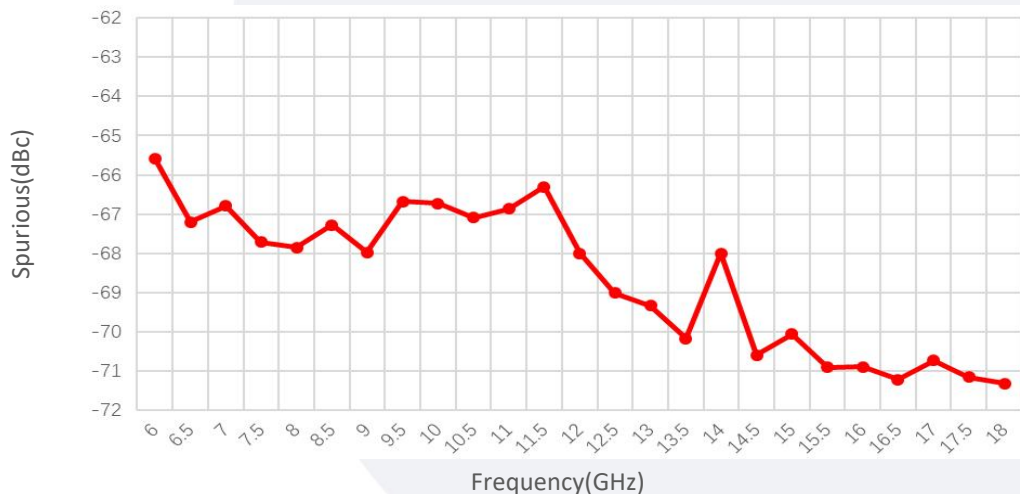

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Harmonic vs Frequency

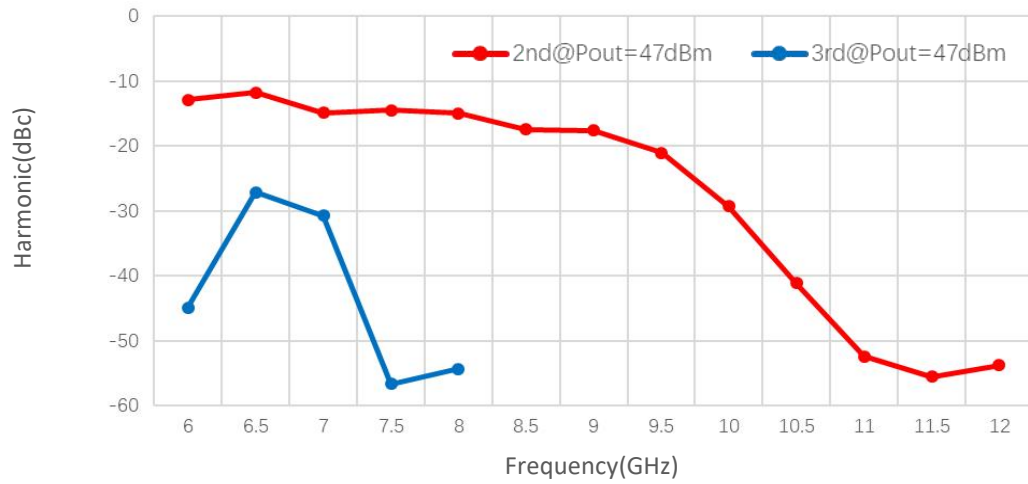

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.