

## Solid State High Power Amplifier Systems

1.2-1.4GHz /63dB Gain/63 dBm Psat/220V AC

Model: TLPA1.2G1.4G-63-63-BC

TLPA1.2G1.4G-63-63-BC is a solid state high power amplifier systems provides high output power and high gain across the 1.2 to 1.4 GHz frequency range. The amplifier features a built-in 220V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

### Features:

- Wide Band: 1.2-1.4GHz
- Power Gain: 63dB Min
- Psat Output Power:63dBm Min
- Protection:Over TEM,over voltage, over current ,over VSWR protection
- 50 Ohm Matched Input / Output



### 电气特性 Electrical Characteristics:

参数 Parameter	代码 Symbol	Min	Typ	Max	单位 Units
频率范围 Frequency range	BW	1.2-1.4			GHz
功率增益 Power Gain	GP	63			dB
增益平坦度 Gain flatness	$\Delta$ GL			$\pm 1.5$	dB
增益调节范围 Gain adjust Range	$\Delta$ GR	30			dB
增益调节步进 Gain adjust Step	$\Delta$ GS		0.5		dB
饱和输出功率 Output Psat	Psat	63			dBm
噪声系数 Noise Figure	NF			15	dB
杂散 Spurious@Pout=63dBm	Spur			-60	dBc
谐波 Harmonics@Pout=63dBm	HAM			-15	dBc
输入驻波 Input VSWR	VSWRin			1.5	:1
输出驻波 Output VSWR	VSWRout			2.5	:1
交流电压 AC Voltage	Vac		220		V AC
功耗 Power Consumption	Pdiss		5500		W
阻抗 Impedance	I/O-IMP	50			Ohms

## 机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	N Female/7/16 Female	
通信接口 Communication Connector	DB9/RJ45	
液晶显示屏 Front Panel LCD Screen Display	7 inch LCD Screen Display	
尺寸 Size	19 Inch 5U*550	mm
重量 Weight	≤45	Kg

## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
输入功率 RF Input Power	+10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

## 外形图 Outline Drawing:

Unit:mm

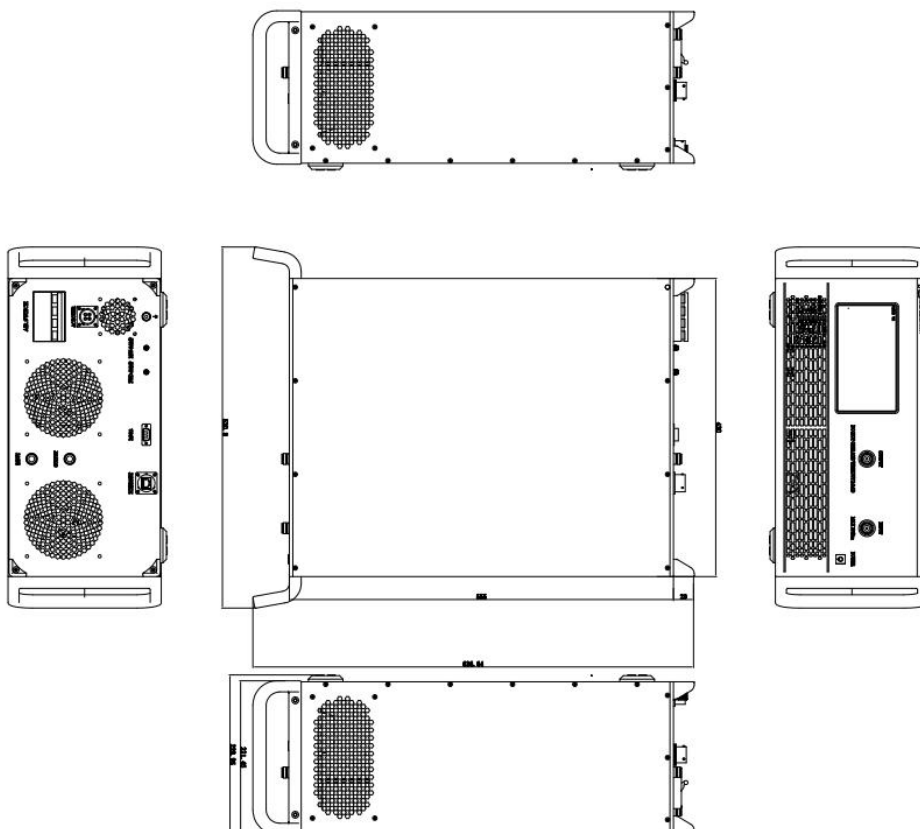

## 主要功能 Key Features:

参数 Parameter	特点 Advantages
控制功能 Control functions	1, Power setting On/Off 2, ALC automatic level control 3, Gain control
内置保护功能 Protection functions	1, Over TEM 2, Over voltage 3, Over current 4, Over VSWR
监控和控制 Remote control	RS422/Ethernet
冷却系统 Cooling system	Built in Cooling system, forced air cooling

## 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-20		+40	°C
存储温度 Non-operating Temperature*	-30		+50	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave, 3 axis both directions			

\*Note: For a wider temperature range, please consult the manufacturer.

## 订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLPA1.2G1.4G-63-63-BC	Solid State High Power Amplifier Systems 1.2-1.4GHz, Gain:63dB, Psat:63 dBm, 220V AC, Built in Fan Cooling	Rev.1.1